



**FEEL THE SW  
DIFFERENCE™**

# **FULL LINE CATALOG**



CELEBRATING  
**38**  
YEARS

SW® IS ON A MISSION TO LEAD THE PERSONAL HAND PROTECTION INDUSTRY WITH SUSTAINABLE SOLUTIONS AND INNOVATION.

OUR BUSINESS



PRIVATELY HELD



WOMAN OWNED



MINORITY LED

OUR TEAM



2,000+ EMPLOYEES

**100+**  
**YEARS**

INDUSTRY EXPERIENCE



CALIFORNIA BASED

MANUFACTURING



6 FACTORIES

WORLDWIDE




MANUFACTURING & DISTRIBUTION



BEST IN CLASS SERVICE & SUPPORT



DEDICATED R&D TEAMS



INDUSTRY LEADING HAND HEALTH TECHNOLOGIES



ENVIRONMENTALLY FOCUSED

OUR PRODUCT PORTFOLIO

SW invests in manufacturing, R&D, and hand health technologies to provide premium products that protect and enhance worker performance. We have a distinct approach to hand protection. It involves thinking differently about ways to improve safety, comfort, and performance. And it is a difference you can feel.

SINGLE USE



MECHANICAL PROTECTION



CHEMICAL PROTECTION



SKIN HEALTH ALLIANCE APPROVED

SW® products are the first single use gloves to be SHA approved:

- skin safe products
- global standard adherence
- low environmental impact
- independent assessments
- support skin charities



## CONTENTS

|   |           |
|---|-----------|
| <b>SW® HAND HEALTH TECHNOLOGIES</b>     | <b>8</b>  |
| EnerGel®                                | 8         |
| pH Natural®                             | 9         |
| DriTek®                                 | 9         |
| Dry Core®                               | 9         |
| <b>SW® PERFORMANCE TECHNOLOGIES</b>     | <b>10</b> |
| EcoTek®                                 | 10        |
| TracTek®                                | 10        |
| Breach Alert®                           | 11        |
| AxiFybr®                                | 11        |
| <b>SINGLE-USE STYLES</b>                | <b>14</b> |
| TrueForm®                               | 16        |
| PowerForm®                              | 22        |
| PowerChem®                              | 32        |
| MegaMan®                                | 36        |
| Bantam™                                 | 40        |
| <b>MECHANICAL PROTECTION</b>            | <b>44</b> |
| GraphEx®                                | 46        |
| KarbonHex®                              | 50        |
| Bullseye™                               | 58        |
| <b>CHEMICAL PROTECTION</b>              | <b>64</b> |
| NewTrile®                               | 66        |
| CoreSafe®                               | 70        |
| <b>UNDERSTANDING CUT STANDARDS</b>      | <b>76</b> |
| <b>UNDERSTANDING CHEMICAL STANDARDS</b> | <b>77</b> |
| <b>GLOVE SIZE SELECTION</b>             | <b>78</b> |
| <b>SPECIFICATION GUIDE</b>              | <b>79</b> |




# EcoTek®

## WEAR IT. TRASH IT. FORGET IT.

### Introducing SW® EcoTek Biodegradable Technology

Proprietary glove formula that accelerates breakdown in landfills without any performance loss.

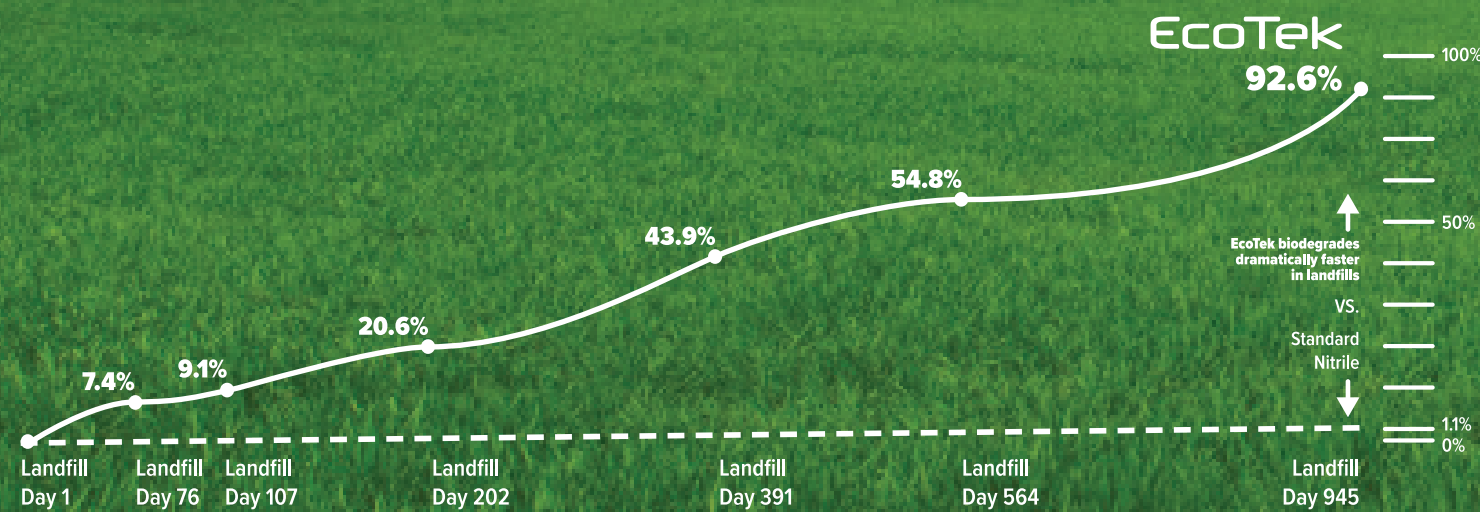

SW nitrile gloves with EcoTek® biodegrade by 92.6% in only 2 years and 6 months under test method ASTM D5526-12, while competing products show virtually no degradation in the same period.

ASTM D5526-12 test results do not predict future biodegradation.

EcoTek is available in four single-use styles.



And introducing NewTrile® with EcoTek® Chemical-Resistant gloves now with biodegradability technology.

**NEWTRILE**  
featuring  
**EcoTek**



# EnerGel®

Hydrates and rejuvenates hands for all-day comfort.  
New patented additive clinically proven to improve hand health.

Available in these popular styles:

 **PowerForm®**  
PF-95LG  
PF-95GW

 **TrueForm®**  
TF-95LG

# Dry Core®

Naturally pulls sweat away from the skin for healthier hands.  
Moisture-wicking system makes for a dry, comfortable environment.

Available in these popular styles:

 **PowerForm®**  
PF-95BL

# pH Natural®

Actively maintains skin pH at natural levels to reduce skin issues.  
Proprietary coating helps keep pH levels at 5.5, reducing microbial growth.

New glove styles coming soon.

# DriTek®

Moisture-wicking flock-lined system for drier, cooler, more comfortable hands.  
Naturally manages sweat for healthier hands and easy donning and doffing.

Available in these popular styles:

 **PowerForm®**  
PF-95GY

 **MegaMan®**  
MM-11BK

# EcoTek®

Proprietary glove formula that dramatically accelerates landfill breakdown. Gloves break down 92.6% over 2.5 years without any impact on glove performance\*.

Available in these popular styles:

- PowerForm®**  
PF-90BK PF-95GW PF-95LG  
PF-95TL PF-95GY PF-95BL  
PF-12TL PF-95OR
- TrueForm®**  
TF-95RB TF-95LG  
TF-12LG
- MegaMan®**  
MM-11BK
- Bantam**  
P-024-098-ECO-WT

\*ASTM D5526-12 test results do not predict future biodegradation.

# TracTek®

Proprietary matrixed pattern that provides dramatic control. Designed for maximum surface-to-surface contact, providing enhanced grip in all conditions.

Available in these popular styles:

- TrueForm®**  
TF-95NT
- PowerForm®**  
PF-95OR

# Breach Alert®

Dual color, 2-ply construction technology provides immediate visual breach detection. Two distinct polymer layers add durability and dramatically improve safety.

Available in these popular styles:

- PowerForm®**  
PF-95GW

# Axifybr®

Proprietary molecularly engineered yarn that dramatically enhances cut resistance. Provides the highest level cut protection with high glove comfort and dexterity.

Available in these popular styles:

- GraphEx**  
G45100 G46200  
G66200
- BULLSEYE**  
C34100 C55104 C56231  
C56201 C56221

# Viral Protection

SW gloves have been successfully tested against the stringent US and EU viral penetration test standards, thus giving stakeholders a high level of protection from viruses, bacteria and fungi. This reduces or eliminates the risk of exposure to biological hazards and guarantees quality of every glove produced.

- ASTM F1671 is the standard used in North America. It is a pass or fail test designed to show whether the material can protect a wearer from viruses transmitted via blood or bodily fluids.
- EN ISO 374-5 Virus standard, is the standard in Europe. It measures the ability of gloves to protect from bacteria, fungi and virus penetration using ISO 16604 as the test method.



# Low Dermatitis Potential

SW® nitrile gloves have been clinically tested and proven to have reduced potential to cause skin irritation. This protection creates a cleaner glove with reduced chemical residues, removes the user's risk of allergic reactions, and will not induce contact dermatitis or Type IV hypersensitivity reaction.


- To achieve a 510K Certification, a medical grade glove must meet ASTM and FDA standards.
- Tested by an FDA registered and certified US laboratory and headed by a board-certified dermatologist. Testing was conducted on a minimum of 200 human subjects, to qualify for the Low Dermatitis Claim.



# SINGLE-USE STYLES

For decades, SW has been the premier manufacturer of single-use performance products. With a relentless focus on new manufacturing technologies and materials that drive innovation, SW single-use styles continuously push the boundaries of quality and worker-enhancing performance that fuels business success.

## The SW<sup>®</sup> Difference

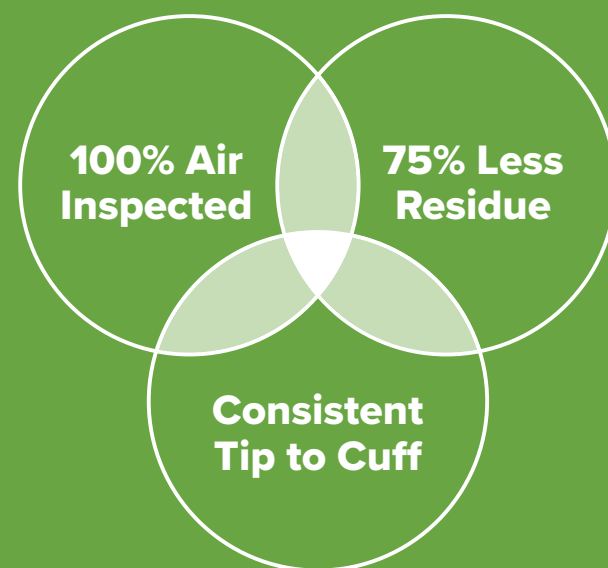


Better products start with better manufacturing.

# 8 Values of Quality

The 8 Values of Quality is the standard that we at SW hold for ourselves. It represents, to the core, how we manufacture our products, interact with stakeholders, and operate as a company.

You can learn more about SW's compliance and ethics on our website at [swsafety.com](http://swsafety.com).

## EIGHT VALUES OF QUALITY

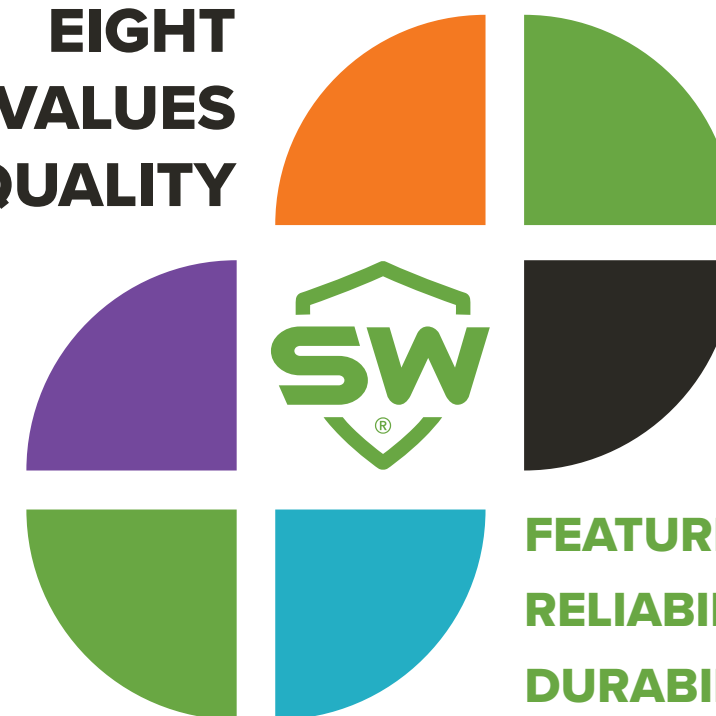

FEATURES  
RELIABILITY  
DURABILITY  
AESTHETICS

PERCEPTION  
PERFORMANCE  
CONFORMANCE  
SERVICEABILITY





# QUALITY. COMFORT. DEXTERITY.

TrueForm® is made for those who rely on daily hand protection to provide ease of use and high dexterity. With TrueForm, quality is designed into every style using exacting manufacturing processes for tip-to-cuff consistency, glove after glove.



## FIRST HAND

This new nitrile exam glove is destined to be the workhorse of any professional practice or facility. When your day-to-day depends on consistent quality protection, this is the glove to reach for to always deliver on expectations, every time.



TF-95RB



**RIGHT WEIGHT**  
At 5 grams and 3.1 mil thickness, it's not too heavy and not too light.

**SAME SAME**  
Manufactured to be consistent and flat packed so each one dispenses with the same quality feel.

**TF** **TF-95RB**

| WEIGHT               | LENGTH | THICKNESS | FEATURES | COLOR      |
|----------------------|--------|-----------|----------|------------|
| 5.0g<br>(large size) | 9.5"   | 3.1 mil   | EcoTek®  | ROYAL BLUE |

**ecotek**

## EXTENDED PROTECTION

These gloves provide tactile sensitivity and great grip with an extended cuff for added protection, so you can work in comfort and confidence.



TF-12LG



**SAFETY**  
Tested for use with harmful chemotherapy drugs

**QUALITY**  
100% air inspected, consistent thickness tip to cuff

**TF** **TF-12LG**

| WEIGHT               | LENGTH | THICKNESS | FEATURES                      | COLOR       |
|----------------------|--------|-----------|-------------------------------|-------------|
| 7.5g<br>(large size) | 12.0"  | 4.9 mil   | Clean Washed<br>Air Inspected | LIGHT GREEN |

**ecotek**

## Models & Ordering Information

### TF-95LG

NITRILE EXAM GLOVES WITH ENERGEL® AND ECOTEK®


- EnerGel hydrates and soothes dry, chapped skin
- Lightly textured surface delivers added grip
- Beaded cuff allows easy donning and doffing
- 100% air inspected / consistent thickness tip to cuff



### TF-95RB

EVERYDAY NITRILE EXAM GLOVES WITH ECOTEK®

- The new lighter standard for everyday exam use
- Consistent quality glove to glove
- Beaded cuff allows easy donning and doffing

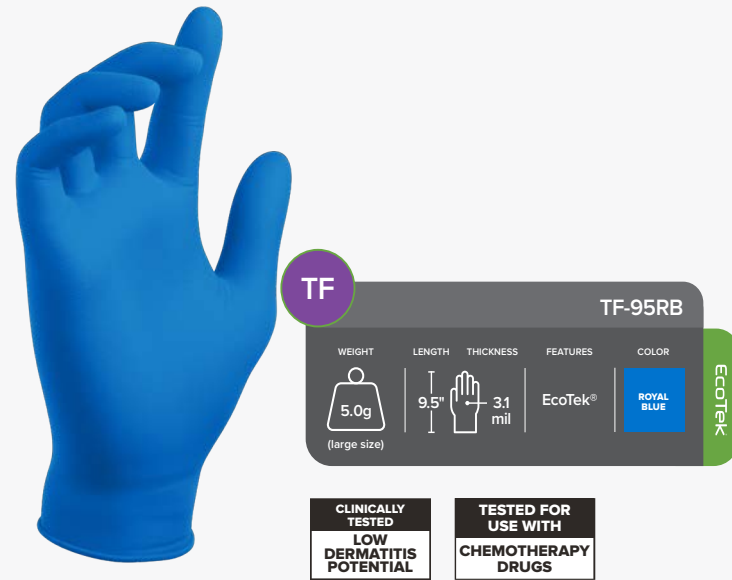

### TF-12LG

EXTENDED CUFF NITRILE EXAM GLOVES WITH ECOTEK®

- Extra length cuff provides additional protection
- Tested for use with harmful chemotherapy drugs
- Lightly textured surface delivers added grip
- 100% air inspected / consistent thickness tip to cuff



#### ORDERING INFORMATION

|         |            |
|---------|------------|
| N128401 | XS: 5.5-6  |
| N128402 | S: 6.5-7   |
| N128403 | M: 7.5-8   |
| N128404 | L: 8.5-9   |
| N128405 | XL: 9.5-10 |

100 Gloves/Box 1000/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | EnerGel         |
| Outer Surface                 | Fully Textured  |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 9.5" / 242mm    |
| Finger Thickness              | 4.0mil / 0.10mm |
| Palm Thickness                | 3.6mil / 0.09mm |
| Tensile Strength Before Aging | 22 MPa          |
| Tensile Strength After Aging  | 20 MPa          |
| Elongation Before Aging       | 560%            |
| Elongation After Aging        | 550%            |
| AQL                           | 1.5             |



#### STANDARDS AND COMPLIANCE

|                        |
|------------------------|
| EN ISO 21420:2020      |
| EN 455:2000-2015       |
| ASTM D6319-19          |
| ASTM F1671-13          |
| ASTM F739-12           |
| REACH EU 1907/2006     |
| EU 2016/425            |
| CAT III Complex Design |
| UL NFPA 1999-2018      |
| FDA 21 CFR 177.2600    |

#### ORDERING INFORMATION

|         |            |
|---------|------------|
| N301341 | XS: 5.5-6  |
| N301342 | S: 6.5-7   |
| N301343 | M: 7.5-8   |
| N301344 | L: 8.5-9   |
| N301345 | XL: 9.5-10 |

100 Gloves/Box 1000/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | Smooth          |
| Outer Surface                 | Textured        |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 9.5" / 242mm    |
| Finger Thickness              | 4.7mil / 0.12mm |
| Palm Thickness                | 3.1mil / 0.08mm |
| Tensile Strength Before Aging | 14 MPa          |
| Tensile Strength After Aging  | 14 MPa          |
| Elongation Before Aging       | 500%            |
| Elongation After Aging        | 400%            |
| AQL                           | 1.5             |



#### STANDARDS AND COMPLIANCE

|                        |
|------------------------|
| EN ISO 21420:2020      |
| EN 455:2000-2015       |
| ASTM D6319-19          |
| ASTM D6978-05 (2019)   |
| ASTM F1671-13          |
| ASTM F739-12           |
| Reach EU 1907/2006     |
| EU 2016/425            |
| ANSI/ISEA 105-2016     |
| CAT III Complex Design |
| FDA 21 CFR 177.2600    |

#### ORDERING INFORMATION

|         |               |
|---------|---------------|
| N027401 | XS: 5.5-6     |
| N027402 | S: 6.5-7      |
| N027403 | M: 7.5-8      |
| N027404 | L: 8.5-9      |
| N027405 | XL: 9.5-10    |
| N027406 | *2XL: 10.5-11 |

100 Gloves/Box 1000/Case  
\*90/Bx, 900/Cs

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | Smooth          |
| Outer Surface                 | Fully Textured  |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 12.0" / 305 mm  |
| Finger Thickness              | 5.9mil / 0.15mm |
| Palm Thickness                | 4.9mil / 0.12mm |
| Tensile Strength Before Aging | 21 MPa          |
| Tensile Strength After Aging  | 19 MPa          |
| Elongation Before Aging       | 580%            |
| Elongation After Aging        | 550%            |
| AQL                           | 1.5             |



#### STANDARDS AND COMPLIANCE

|                        |
|------------------------|
| EN ISO 21420:2020      |
| EN 455:2000-2015       |
| ASTM D6319-19          |
| ASTM D6978-05 (2019)   |
| ASTM F1671-13          |
| ASTM F739-12           |
| Reach EU 1907/2006     |
| EU 2016/425            |
| CAT III Complex Design |
| UL NFPA 1999-2018      |
| FDA 21 CFR 177.2600    |



# DESIGNED. ENGINEERED. PERFORMANCE.

PowerForm® brings new hand protection technologies to workplace performance. From sweat management to enhanced grip design, PowerForm features enable workers to execute tasks with more confidence. PowerForm focuses on functional advancements to optimize on-the-job performance every day.



## A TRIPLE FEATURE

Made for those high-risk environments where, if there is a glove breach, you need to know now. The white interior of this dual layer glove provides an immediate sign of any puncture or compromise. In addition, EnerGel rejuvenates hands for long-term wear and EcoTek accelerates glove breakdown in landfills.



**PF-95GW**

EnerGel®

EcoTek®

Breach Alert®



### SEE IT

Dual-layer Breach Alert® provides extra durability and security you can see.



### AHHH

EnerGel® hand rejuvenating technology hydrates and soothes for added comfort and hand health.

PF

**PF-95GW**

| WEIGHT               | LENGTH | THICKNESS | FEATURES                             | COLOR          |
|----------------------|--------|-----------|--------------------------------------|----------------|
| 6.5g<br>(large size) | 9.5"   | 4.9 mil   | EnerGel®<br>Breach Alert®<br>EcoTek® | GREEN<br>WHITE |

EcoTek

### GOOD BYE

EcoTek® biodegradability technology breaks down in landfills for less environmental impact.

## SWEAT PROBLEMS SOLVED

Work in comfort with DriTek, built-in moisture absorbing technology that keeps hands dryer and cooler. When done, simply toss the gloves in the trash and let EcoTek biodegradable technology take over. Wear it. Trash it. Forget it.



**PF-95GY**

DriTek®

EcoTek®



### HANG ON

Fully textured for secure grip

### NO SWEAT, IT'S DRITEK®

Moisture absorbent lining keeps hands dry, cool and healthy.

PF

**PF-95GY**

| WEIGHT               | LENGTH | THICKNESS | FEATURES           | COLOR |
|----------------------|--------|-----------|--------------------|-------|
| 8.8g<br>(large size) | 9.5"   | 6.2 mil   | DriTek®<br>EcoTek® | GRAY  |

EcoTek

### GOOD BYE

EcoTek® biodegradability technology breaks down in landfills for less environmental impact.

## Models & Ordering Information

### PF-90BK

NITRILE EXAM GLOVES WITH ECOTEK®

- Lightly textured surface delivers added grip
- Beaded cuff allows easy donning and doffing
- 100% air inspected / consistent thickness tip to cuff
- EcoTek technology breaks down in landfills in less time



### PF-95TL

NITRILE EXAM GLOVES WITH ECOTEK®

- Lightly textured surface delivers added grip
- Beaded cuff allows easy donning and doffing
- 100% air inspected / consistent thickness tip to cuff
- EcoTek technology breaks down in landfills in less time



### PF-95GW

DUAL LAYER NITRILE EXAM GLOVES WITH ENERGEL®, BREACH ALERT® AND ECOTEK®

- EnerGel hand rejuvenating technology for comfort and hand health
- Breach Alert dual-layer provides extra durability and safety
- 100% air inspected / consistent thickness tip to cuff
- EcoTek technology breaks down in landfills in less time



#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| N716882 | S: 6.5-7     |
| N716883 | M: 7.5-8     |
| N716884 | L: 8.5-9     |
| N716885 | XL: 9.5-10   |
| N716886 | 2XL: 10.5-11 |

100 Gloves/Box 1000/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | Smooth          |
| Outer Surface                 | Fully Textured  |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 9.0" / 229 mm   |
| Finger Thickness              | 5.6mil / 0.14mm |
| Palm Thickness                | 5.0mil / 0.13mm |
| Tensile Strength Before Aging | 22 MPa          |
| Tensile Strength After Aging  | 20 MPa          |
| Elongation Before Aging       | 540%            |
| Elongation After Aging        | 520%            |
| AQL                           | 1.5             |



#### STANDARDS AND COMPLIANCE

|                        |
|------------------------|
| EN ISO 21420:2020      |
| EN 455:2000-2015       |
| ASTM D6319-19          |
| ASTM F1671-13          |
| ASTM F739-12           |
| Reach EU 1907/2006     |
| EU 2016/425            |
| CAT III Complex Design |
| FDA 21 CFR 177.2600    |

#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| N200362 | S: 6.5-7     |
| N200363 | M: 7.5-8     |
| N200364 | L: 8.5-9     |
| N200365 | XL: 9.5-10   |
| N200366 | 2XL: 10.5-11 |

100 Gloves/Box 1000/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | Smooth          |
| Outer Surface                 | Fully Textured  |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 9.5" / 242 mm   |
| Finger Thickness              | 5.8mil / 0.15mm |
| Palm Thickness                | 5.0mil / 0.13mm |
| Tensile Strength Before Aging | 21 MPa          |
| Tensile Strength After Aging  | 20 MPa          |
| Elongation Before Aging       | 560%            |
| Elongation After Aging        | 540%            |
| AQL                           | 1.5             |



#### STANDARDS AND COMPLIANCE

|                        |
|------------------------|
| EN ISO 21420:2020      |
| EN 455:2000-2015       |
| ASTM D6319-19          |
| ASTM D6978-05 (2019)   |
| ASTM F1671-13          |
| ASTM F739-12           |
| Reach EU 1907/2006     |
| EU 2016/425            |
| CAT III Complex Design |

#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| N189471 | XS: 5.5-6    |
| N189472 | S: 6.5-7     |
| N189473 | M: 7.5-8     |
| N189474 | L: 8.5-9     |
| N189475 | XL: 9.5-10   |
| N189476 | 2XL: 10.5-11 |

100 Gloves/Box 1000/Case

#### PHYSICAL PROPERTIES

|                               |                        |
|-------------------------------|------------------------|
| Inner Surface                 | EnerGel / Breach Alert |
| Outer Surface                 | Fully Textured         |
| Cuff Finish                   | Beaded                 |
| Fit Type                      | Ambidextrous           |
| Length                        | 9.5" / 242 mm          |
| Finger Thickness              | 5.9mil / 0.15mm        |
| Palm Thickness                | 4.9mil / 0.13mm        |
| Tensile Strength Before Aging | 18 MPa                 |
| Tensile Strength After Aging  | 18 MPa                 |
| Elongation Before Aging       | 550%                   |
| Elongation After Aging        | 500%                   |
| AQL                           | 1.5                    |



#### STANDARDS AND COMPLIANCE

|                        |
|------------------------|
| EN ISO 21420:2020      |
| EN 455:2000-2015       |
| ASTM D6319-19          |
| ASTM D6978-05 (2019)   |
| ASTM F1671-13          |
| ASTM F739-12           |
| Reach EU 1907/2006     |
| EU 2016/425            |
| CAT III Complex Design |
| UL NFPA 1999-2018      |
| FDA 21 CFR 177.2600    |

## Models & Ordering Information

### PF-95LG

NITRILE EXAM GLOVES WITH ENERGEL® AND ECOTEK®

- EnerGel hydrates and soothes dry, chapped skin
- Tested for use with harmful chemotherapy drugs
- Lightly textured surface delivers added grip
- 100% air inspected / consistent thickness tip to cuff



### PF-95OR

NITRILE EXAM GLOVES WITH TRACTEK® AND ECOTEK®

- TracTek® high density pattern for grip in wet / oily conditions
- EcoTek® technology breaks down in landfills in less time
- Hi-Vis orange color
- Beaded cuff allows easy donning and doffing



### PF-95BL

NITRILE EXAM GLOVES WITH DRY CORE® AND ECOTEK®

- Dry Core absorbent technology keeps hands dry and cool
- Lightly textured surface delivers added grip
- Beaded cuff allows easy donning and doffing
- 100% air inspected / consistent thickness tip to cuff
- ANSI Level 3 abrasion resistance



#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| N129401 | XS: 5.5-6    |
| N129402 | S: 6.5-7     |
| N129403 | M: 7.5-8     |
| N129404 | L: 8.5-9     |
| N129405 | XL: 9.5-10   |
| N129406 | 2XL: 10.5-11 |

100 Gloves/Box 1000/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | EnerGel         |
| Outer Surface                 | Fully Textured  |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 9.5" / 242 mm   |
| Finger Thickness              | 5.9mil / 0.15mm |
| Palm Thickness                | 5.1mil / 0.13mm |
| Tensile Strength Before Aging | 20 MPa          |
| Tensile Strength After Aging  | 20 MPa          |
| Elongation Before Aging       | 570%            |
| Elongation After Aging        | 550%            |
| AQL                           | 1.5             |



#### STANDARDS AND COMPLIANCE

|                        |
|------------------------|
| EN ISO 21420:2020      |
| EN 455:2000-2015       |
| ASTM D6319-19          |
| ASTM D6978-05 (2019)   |
| ASTM F1671-13          |
| ASTM F739-12           |
| Reach EU 1907/2006     |
| EU 2016/425            |
| CAT III Complex Design |
| UL NFPA 1999-2018      |
| FDA 21 CFR 177.2600    |

#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| N991752 | S: 6.5-7     |
| N991753 | M: 7.5-8     |
| N991754 | L: 8.5-9     |
| N991755 | XL: 9.5-10   |
| N991756 | 2XL: 10.5-11 |

50 Gloves/Box 500/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | Smooth          |
| Outer Surface                 | TracTek         |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 9.5" / 242 mm   |
| Finger Thickness              | 5.9mil / 0.15mm |
| Palm Thickness                | 5.1mil / 0.13mm |
| Tensile Strength Before Aging | 14 MPa          |
| Tensile Strength After Aging  | 14 MPa          |
| Elongation Before Aging       | 500%            |
| Elongation After Aging        | 400%            |
| AQL                           | 1.5             |



#### STANDARDS AND COMPLIANCE

|                    |
|--------------------|
| EN 420:2003        |
| EN 455:2000-2015   |
| EU 2016/425        |
| Reach EU 1907/2006 |
| ANSI/ISEA 105-2016 |
| US/EU Food Contact |

#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| N106551 | XS: 5.5-6    |
| N106552 | S: 6.5-7     |
| N106553 | M: 7.5-8     |
| N106554 | L: 8.5-9     |
| N106555 | XL: 9.5-10   |
| N106556 | 2XL: 10.5-11 |

50 Gloves/Box 500/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | Dry Core        |
| Outer Surface                 | Fully Textured  |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 9.5" / 242 mm   |
| Finger Thickness              | 6.9mil / 0.18mm |
| Palm Thickness                | 6.1mil / 0.16mm |
| Tensile Strength Before Aging | 20 MPa          |
| Tensile Strength After Aging  | 19 MPa          |
| Elongation Before Aging       | 560%            |
| Elongation After Aging        | 550%            |
| AQL                           | 1.5             |



#### STANDARDS AND COMPLIANCE

|                        |
|------------------------|
| EN ISO 21420:2020      |
| EN 455:2000-2015       |
| ASTM D6319-19          |
| ASTM F1671-13          |
| ASTM F739-12           |
| Reach EU 1907/2006     |
| EU 2016/425            |
| CAT III Complex Design |
| ANSI/ISEA 105-2016     |
| FDA 21 CFR 177.2600    |

## Models & Ordering Information

### PF-95GY

NITRILE EXAM GLOVES WITH DRITEK® AND ECOTEK®

- DriTek absorbent lining keeps hands dry and cool
- Fully textured surface delivers excellent grip
- 100% air inspected / consistent thickness tip to cuff
- EcoTek technology breaks down in landfills in less time
- ANSI Level 2 abrasion resistance



**PF** **PF-95GY**

| WEIGHT                              | LENGTH | THICKNESS | FEATURES           | COLOR |
|-------------------------------------|--------|-----------|--------------------|-------|
| 8.8g<br><small>(large size)</small> | 9.5"   | 6.2 mil   | DriTek®<br>EcoTek® | GRAY  |

ECOTEK

TESTED FOR USE WITH FENTANYL & SIMULATED GASTRIC ACID

TESTED FOR USE WITH CHEMOTHERAPY DRUGS

### PF-12TL

EXTENDED CUFF HEAVY DUTY NITRILE EXAM GLOVES WITH ECOTEK®

- Extended cuff provides added worker protection
- Tested for use with harmful chemotherapy drugs
- Lightly textured surface delivers added grip
- 100% air inspected / consistent thickness tip to cuff



**PF** **PF-12TL**

| WEIGHT                               | LENGTH | THICKNESS | FEATURES                                 | COLOR |
|--------------------------------------|--------|-----------|--|-------|
| 10.7g<br><small>(large size)</small> | 12.0"  | 6.2 mil   | EcoTek®<br>Clean Washed<br>Air Inspected | TEAL  |

ECOTEK

TESTED FOR USE WITH FENTANYL & SIMULATED GASTRIC ACID

CLINICALLY TESTED LOW DERMATITIS POTENTIAL

TESTED FOR USE WITH CHEMOTHERAPY DRUGS

#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| N260501 | XS: 5.5-6    |
| N260502 | S: 6.5-7     |
| N260503 | M: 7.5-8     |
| N260504 | L: 8.5-9     |
| N260505 | XL: 9.5-10   |
| N260506 | 2XL: 10.5-11 |

50 Gloves/Box 500/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | DriTek          |
| Outer Surface                 | Fully Textured  |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 9.5" / 242 mm   |
| Finger Thickness              | 8.2mil / 0.21mm |
| Palm Thickness                | 6.2mil / 0.16mm |
| Tensile Strength Before Aging | 15 MPa          |
| Tensile Strength After Aging  | 16 MPa          |
| Elongation Before Aging       | 550%            |
| Elongation After Aging        | 500%            |
| AQL                           | 1.5             |



#### STANDARDS AND COMPLIANCE

|                        |
|------------------------|
| EN ISO 21420:2020      |
| EN 455:2000-2015       |
| ASTM D6319-19          |
| ASTM D6978-05 (2019)   |
| ASTM F1671-13          |
| ASTM F739-12           |
| Reach EU 1907/2006     |
| EU 2016/425            |
| CAT III Complex Design |
| ANSI/ISEA 105-2016     |
| FDA 21 CFR 177.2600    |

#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| N127361 | XS: 5.5-6    |
| N127362 | S: 6.5-7     |
| N127363 | M: 7.5-8     |
| N127364 | L: 8.5-9     |
| N127365 | XL: 9.5-10   |
| N127366 | 2XL: 10.5-11 |

50 Gloves/Box 500/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | Smooth          |
| Outer Surface                 | Fully Textured  |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 12.0" / 242 mm  |
| Finger Thickness              | 7.1mil / 0.18mm |
| Palm Thickness                | 6.2mil / 0.16mm |
| Tensile Strength Before Aging | 21 MPa          |
| Tensile Strength After Aging  | 20 MPa          |
| Elongation Before Aging       | 575%            |
| Elongation After Aging        | 560%            |
| AQL                           | 1.5             |



#### STANDARDS AND COMPLIANCE

|                        |
|------------------------|
| EN ISO 21420:2020      |
| EN 455:2000-2015       |
| ASTM D6319-19          |
| ASTM D6978-05 (2019)   |
| ASTM F1671-13          |
| ASTM F739-12           |
| Reach EU 1907/2006     |
| EU 2016/425            |
| CAT III Complex Design |
| UL NFPA 1999-2018      |
| FDA 21 CFR 177.2600    |





# INTRICATE. TECHNICAL. ADVANCED.

Born of SW® manufacturing capabilities and advancements in material science, PowerChem offers chemical protection for highly specific applications. SW will be introducing new PowerChem styles that address a range of complex and specialized technical needs.



## Models & Ordering Information

### PC-044-095-GR

NEOPRENE EXAM GLOVES

- Extended cuff provides added protection
- Fully textured surface delivers excellent grip
- 100% air inspected / consistent thickness tip to cuff
- Extra thickness for more durability



### PC-95GR

NEOPRENE EXAM GLOVES


- Tested for use with chemotherapy drugs
- Textured surface delivers excellent grip
- Beaded cuff allows easy donning and doffing
- Neoprene material for softness, elasticity, and chemical resistance



### PC-115GR

EXTENDED CUFF NEOPRENE EXAM GLOVES

- Extended cuff provides added protection
- Tested for use with chemotherapy drugs
- Textured surface delivers excellent grip
- Beaded cuff allows easy donning and doffing
- Neoprene material for softness, elasticity, and chemical resistance

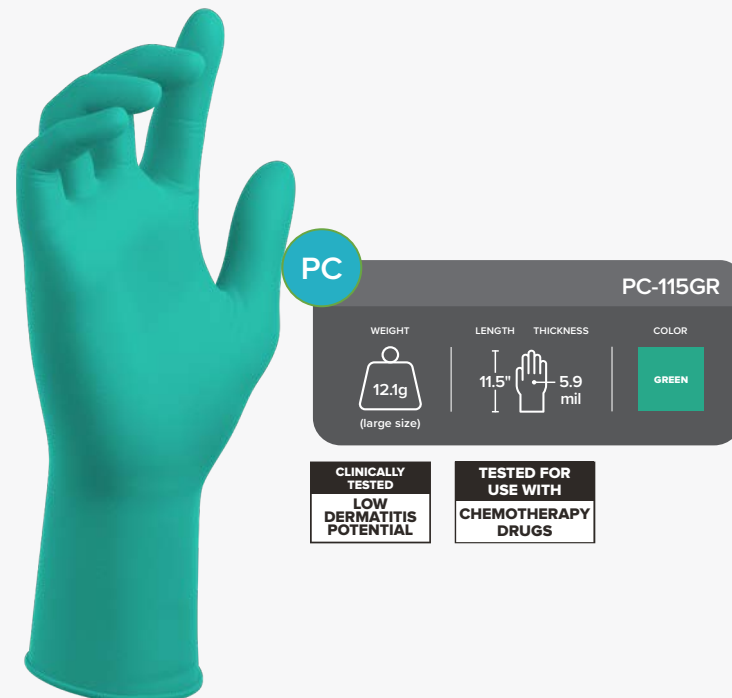

#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| K000402 | S: 6.5-7     |
| K000403 | M: 7.5-8     |
| K000404 | L: 8.5-9     |
| K000405 | XL: 9.5-10   |
| K000406 | 2XL: 10.5-11 |

100 Gloves/Box 1000/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | Smooth          |
| Outer Surface                 | Textured        |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 9.5" / 242 mm   |
| Finger Thickness              | 3.5mil / 0.09mm |
| Palm Thickness                | 2.8mil / 0.07mm |
| Tensile Strength Before Aging | 14 MPa          |
| Tensile Strength After Aging  | 14 MPa          |
| Elongation Before Aging       | 500%            |
| Elongation After Aging        | 400%            |
| AQL                           | 1.5             |



#### STANDARDS AND COMPLIANCE

|                     |
|---------------------|
| EN ISO 21420:2020   |
| EN 455:2000-2015    |
| ASTM D6977-19       |
| Reach EU 1907/2006  |
| EU 2016/425         |
| FDA 21 CFR 177.2600 |

#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| K001401 | XS: 5.5-6    |
| K001402 | S: 6.5-7     |
| K001403 | M: 7.5-8     |
| K001404 | L: 8.5-9     |
| K001405 | XL: 9.5-10   |
| K001406 | 2XL: 10.5-11 |

100 Gloves/Box 1000/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | Smooth          |
| Outer Surface                 | Textured        |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 9.5" / 242 mm   |
| Finger Thickness              | 6.2mil / 0.16mm |
| Palm Thickness                | 4.7mil / 0.12mm |
| Tensile Strength Before Aging | 18 MPa          |
| Tensile Strength After Aging  | 18 MPa          |
| Elongation Before Aging       | 750%            |
| Elongation After Aging        | 700%            |
| AQL                           | 1.5             |



#### STANDARDS AND COMPLIANCE

|                        |
|------------------------|
| EN ISO 21420:2020      |
| EN 455:2000-2015       |
| ASTM D6977-19          |
| ASTM F1671-13          |
| ASTM F739-12           |
| Reach EU 1907/2006     |
| EU 2016/425            |
| CAT III Complex Design |
| FDA 21 CFR 177.2600    |

#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| K071402 | S: 6.5-7     |
| K071403 | M: 7.5-8     |
| K071404 | L: 8.5-9     |
| K071405 | XL: 9.5-10   |
| K071406 | 2XL: 10.5-11 |

50 Gloves/Box 500/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | Smooth          |
| Outer Surface                 | Textured        |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 11.5" / 290 mm  |
| Finger Thickness              | 7.5mil / 0.19mm |
| Palm Thickness                | 5.9mil / 0.15mm |
| Tensile Strength Before Aging | 18 MPa          |
| Tensile Strength After Aging  | 18 MPa          |
| Elongation Before Aging       | 750%            |
| Elongation After Aging        | 700%            |
| AQL                           | 1.5             |



#### STANDARDS AND COMPLIANCE

|                        |
|------------------------|
| EN ISO 21420:2020      |
| EN 455:2000-2015       |
| ASTM D6977-19          |
| ASTM F1671-13          |
| ASTM F739-12           |
| Reach EU 1907/2006     |
| EU 2016/425            |
| CAT III Complex Design |
| FDA 21 CFR 177.2600    |



# TOUGHER. ROUGHER. READY.

MegaMan pushes the boundaries of single-use hand protection performance – with new levels of abrasion resistance, sweat management, and comfort that deliver in exceedingly severe environments. When protection performance matters most, it's no wonder MegaMan gets the call for the toughest jobs.



## MEGA TOUGH

The glove that set the new standard for single-use protection. Featuring a consistent 8.5 mil thickness, ANSI Level 3 abrasion resistance, and DriTek® absorbent lining, it is ready to take the call for any job.



**MM-11BK**


DriTek®

EcoTek®



### RELIABLY TOUGH

Consistent 8.5 mil thickness for tip to cuff consistency, and 100% air inspected.

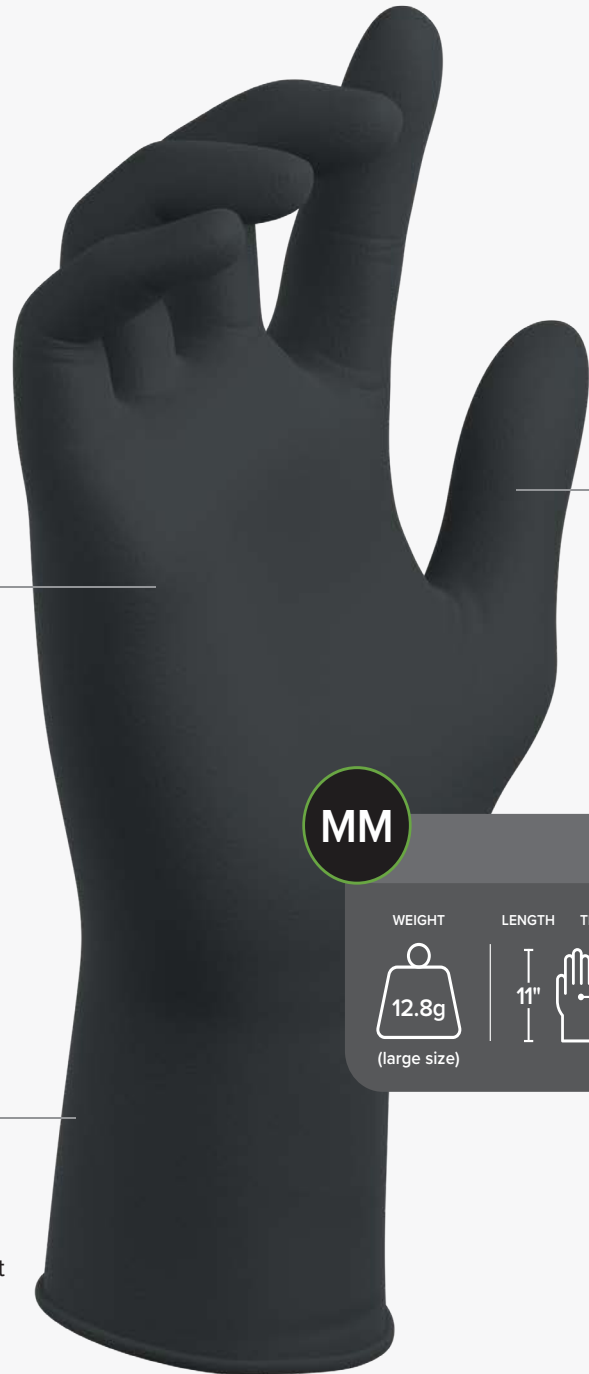

### NO SWEAT, IT'S DRITEK®

Moisture absorbent lining keeps hands dry, cool and healthy.

MM

MM-11BK

| WEIGHT                | LENGTH | THICKNESS | FEATURES           | COLOR |
|-----------------------|--------|-----------|--------------------|-------|
| 12.8g<br>(large size) | 11"    | 8.5 mil   | DriTek®<br>EcoTek® | BLACK |

EcoTek

### MULTILAYER CONSTRUCTION

ANSI and EN Level 3 abrasion resistance that lasts up to 3x longer.



#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| N260881 | XS: 5.5-6    |
| N260882 | S: 6.5-7     |
| N260883 | M: 7.5-8     |
| N260884 | L: 8.5-9     |
| N260885 | XL: 9.5-10   |
| N260886 | 2XL: 10.5-11 |
| N260887 | 3XL: 11.5-12 |

50 Gloves/Box 500/Case

#### VEND PACK

|         |              |
|---------|--------------|
| N164882 | S: 6.5-7     |
| N164883 | M: 7.5-8     |
| N164884 | L: 8.5-9     |
| N164885 | XL: 9.5-10   |
| N164886 | 2XL: 10.5-11 |
| N164887 | 3XL: 11.5-12 |

8 Gloves/Pack 800/Case

#### PHYSICAL PROPERTIES

|                               |                  |
|-------------------------------|------------------|
| Inner Surface                 | DriTek           |
| Outer Surface                 | Fully Textured   |
| Cuff Finish                   | Beaded           |
| Fit Type                      | Ambidextrous     |
| Length                        | 11.0" / 280 mm   |
| Finger Thickness              | 10.1mil / 0.26mm |
| Palm Thickness                | 8.5mil / 0.22mm  |
| Tensile Strength Before Aging | 17 MPa           |
| Tensile Strength After Aging  | 16 MPa           |
| Elongation Before Aging       | 560%             |
| Elongation After Aging        | 520%             |
| AQL                           | 1.5              |



#### STANDARDS AND COMPLIANCE

|                        |
|------------------------|
| EN ISO 21420:2020      |
| EN 455:2000-2015       |
| ASTM D6319-19          |
| ASTM D6978-05 (2019)   |
| ASTM F1671-13          |
| ASTM F739-12           |
| Reach EU 1907/2006     |
| EU 2016/425            |
| ANSI/ISEA 105-2016     |
| CAT III Complex Design |
| FDA 21 CFR 177.2600    |

# Bantam™

## LIGHTWEIGHT TPE PROTECTION

Bantam is the economical choice for comfort and convenient protection. Available in exam grade and industrial grade styles, TPE gloves provide chemical resistance similar to natural rubber latex while offering a high degree of sensitivity and dexterity. The clean material and manufacturing process result in low residue gloves that reduce the risk of harmful skin reactions – making them suitable for a wide range of workers.



# Bantam™

## Models & Ordering Information

### P-021-098-WT

WHITE SINGLE-USE THERMOPLASTIC ELASTOMER (TPE) GLOVES

- Food safe
- High tensile strength and stretchability
- Industrial use 4.0 AQL
- Outperforms vinyl gloves



### P-024-098-ECO-WT

WHITE EXAM BIODEGRADABLE GRADE THERMOPLASTIC ELASTOMER (TPE) GLOVES

- Food safe
- High tensile strength and stretchability
- Exceeds 1.5 AQL laboratory standards
- Outperforms vinyl gloves



#### ORDERING INFORMATION

|         |            |
|---------|------------|
| P790103 | M: 7.5-8   |
| P790104 | L: 8.5-9   |
| P790105 | XL: 9.5-10 |

200 Gloves/Box 5 Boxes/Case

#### PHYSICAL PROPERTIES

|                               |              |
|-------------------------------|--------------|
| Material                      | TPE          |
| Cuff Type                     | Straight     |
| Fit Type                      | Ambidextrous |
| Length                        | 9.8"         |
| Palm Thickness                | 2.1mil       |
| Cuff Thickness                | 2.1mil       |
| Finger Thickness              | 2.1mil       |
| Tensile Strength Before Aging | 11 MPa       |
| Tensile Strength After Aging  | 11 MPa       |
| Elongation Before Aging       | 300%         |
| Elongation After Aging        | 300%         |
| AQL                           | 4.0          |



#### STANDARDS AND COMPLIANCE

|                    |
|--------------------|
| EN ISO 21420:2020  |
| Reach EU 1907/2006 |
| EU 2016/425        |

#### ORDERING INFORMATION

|         |            |
|---------|------------|
| P700102 | S: 6.5-7   |
| P700103 | M: 7.5-8   |
| P700104 | L: 8.5-9   |
| P700105 | XL: 9.5-10 |

200 Gloves/Box 5 Boxes/Case

#### PHYSICAL PROPERTIES

|                               |              |
|-------------------------------|--------------|
| Material                      | TPE          |
| Cuff Type                     | Straight     |
| Fit Type                      | Ambidextrous |
| Length                        | 9.8"         |
| Palm Thickness                | 3.2mil       |
| Cuff Thickness                | 3.2mil       |
| Finger Thickness              | 3.2mil       |
| Tensile Strength Before Aging | 11 MPa       |
| Tensile Strength After Aging  | 11 MPa       |
| Elongation Before Aging       | 300%         |
| Elongation After Aging        | 300%         |
| AQL                           | 1.5          |



#### STANDARDS AND COMPLIANCE

|                    |
|--------------------|
| EN ISO 21420:2020  |
| EN 455-2000-2015   |
| ASTM D5250-19      |
| Reach EU 1907/2006 |
| EU 2016/425        |



# MECHANICAL PROTECTION

SW® has brought its innovation and hand health mindset to cut-resistant gloves. Our new products are developed in the service of protecting workers and giving them more comfort and confidence to make them more successful every day.



# THE INDUSTRIAL UPGRADE

**GRAPHEX® is a new line of hand protection featuring our AxiFybr® cut-resistant technology.**

Proprietary AxiFybr® yarn is engineered at the molecular level enabling GraphEx™ products to provide the highest level of cut protection without loss of comfort, fit or flexibility.

## GRAPHEX®

*featuring*

**AxiFybr**

### GRAPHEX™

**G45100**



### GRAPHEX™

**G46200**



### GRAPHEX™

**G66200**



**GRAPHEX® with AxiFybr® Cut-Resistant Technology**  
48% stronger, 21% more cut-resistant, and **2X** more abrasion-resistant than the competition.



# GraphEx®

## Models & Ordering Information

### G45100

CUT RESISTANT LEVEL 4 MECHANICAL GLOVES WITH AXIFYBR®

- Even at advanced abrasion levels, these are touch screen compatible.
- Proprietary yarn technology is 45% stronger and 21% more cut-resistant without sacrificing fit or comfort.
- Hi-Vis cuff provides instant indication of specific cut level and size from a distance.



#### ORDERING INFORMATION

|         |         |
|---------|---------|
| G451002 | S: 7    |
| G451003 | M: 8    |
| G451004 | L: 9    |
| G451005 | XL: 10  |
| G451006 | 2XL: 11 |

12 Pairs/Bag 6 Bags/Case

#### PHYSICAL PROPERTIES

|                  |                      |
|------------------|----------------------|
| Coating Material | Micro Porous Nitrile |
| Liner Material   | AxiFybr®             |
| Cuff Type        | Knit                 |
| Fit Type         | Hand-Specific        |
| Length           | 10.2"                |
| Abrasion Level   | ANSI 5               |
| Cut Level        | ANSI A4              |
| Gauge            | 18G                  |



#### STANDARDS AND COMPLIANCE

|                      |
|----------------------|
| EN 420-2003+A1: 2009 |
| EN 388:2016          |
| FDA 21 CFR 177.1520  |
| FDA 21 CFR 177.2600  |

### G46200

CUT RESISTANT LEVEL 4 MECHANICAL GLOVES WITH AXIFYBR®

- Even at advanced abrasion levels, these are touch screen compatible.
- Proprietary yarn technology is 45% stronger and 21% more cut-resistant without sacrificing fit or comfort.
- Hi-Vis cuff provides instant indication of specific cut level and size from a distance.



#### ORDERING INFORMATION

|         |         |
|---------|---------|
| G462002 | S: 7    |
| G462003 | M: 8    |
| G462004 | L: 9    |
| G462005 | XL: 10  |
| G462006 | 2XL: 11 |

12 Pairs/Bag 6 Bags/Case

#### PHYSICAL PROPERTIES

|                  |                      |
|------------------|----------------------|
| Coating Material | Micro Porous Nitrile |
| Liner Material   | AxiFybr®             |
| Cuff Type        | Knit                 |
| Fit Type         | Hand-Specific        |
| Length           | 10.2"                |
| Abrasion Level   | ANSI 6               |
| Cut Level        | ANSI A4              |
| Gauge            | 18G                  |



#### STANDARDS AND COMPLIANCE

|                      |
|----------------------|
| EN 420-2003+A1: 2009 |
| EN 388:2016          |
| FDA 21 CFR 177.1520  |
| FDA 21 CFR 177.2600  |

### G66200

CUT RESISTANT LEVEL 6 MECHANICAL GLOVES WITH AXIFYBR®

- Even at advanced abrasion levels, these are touch screen compatible.
- Proprietary yarn technology is 45% stronger and 21% more cut-resistant without sacrificing fit or comfort.
- Hi-Vis cuff provides instant indication of specific cut level and size from a distance.



#### ORDERING INFORMATION

|         |         |
|---------|---------|
| G662002 | S: 7    |
| G662003 | M: 8    |
| G662004 | L: 9    |
| G662005 | XL: 10  |
| G662006 | 2XL: 11 |

12 Pairs/Bag 6 Bags/Case

#### PHYSICAL PROPERTIES

|                  |                      |
|------------------|----------------------|
| Coating Material | Micro Porous Nitrile |
| Liner Material   | AxiFybr®             |
| Cuff Type        | Knit                 |
| Fit Type         | Hand-Specific        |
| Length           | 10.2"                |
| Abrasion Level   | ANSI 6               |
| Cut Level        | ANSI A6              |
| Gauge            | 18G                  |



#### STANDARDS AND COMPLIANCE

|                      |
|----------------------|
| EN 420-2003+A1: 2009 |
| EN 388:2016          |
| FDA 21 CFR 177.1520  |
| FDA 21 CFR 177.2600  |

# KARBONHEX

## MECHANICAL PROTECTION GLOVES

KARBONHEX® is an advanced, innovative range of ergonomic hand protection that was originally conceptualized, designed and styled specifically for professionals working in the most challenging conditions.



# KARBONHEX

## Models & Ordering Information

### KARBONHEX KX70

PURPOSE BUILT CUT-RESISTANT GLOVES

KOMPLEX HANDLING

- 10 gauge cut-resistant, knitted thermal shell
- Sandy foam latex with 3/4 dip
- Elastic knit wrist ensures a comfortable and secure fit



**KARBONHEX**  
C24465

| RATINGS |            | COATING    | GRIP  | FEATURES | COLOR   |
|---------|------------|------------|-------|----------|---------|
| ANSI    | EN511:2016 | EN388:2016 |       |          |         |
| A2      | 4          | XX         | 3441B | Latex    | Sandy   |
| CUT     | ABR        | TEAR       |       |          | Thermal |
|         |            |            |       |          | GRAY    |
|         |            |            |       |          | Black   |

| ORDERING INFORMATION            |         |
|---------------------------------|---------|
| C244653                         | M: 8    |
| C244654                         | L: 9    |
| C244655                         | XL: 10  |
| C244656                         | 2XL: 11 |
| <b>12 Pairs/Bag 6 Bags/Case</b> |         |

| PHYSICAL PROPERTIES |                  |
|---------------------|------------------|
| Coating Material    | Latex            |
| Liner Material      | Knitted Fleece   |
| Grip Finish         | Sandy            |
| Fit Type            | Hand-Specific    |
| Length              | 10.2"            |
| Abrasion Level      | ANSI 4 / EN388 1 |
| Cut Level           | ANSI 4 / EN388 B |
| Gauge               | 10G              |

| STANDARDS AND COMPLIANCE |
|--------------------------|
| EN 511: 2016             |
| EN 388:2016              |

### KARBONHEX KX84V

PURPOSE BUILT COLD-RESISTANT GLOVES

KOMPLEX HANDLING

- 10 gauge cut-resistant, hi-vis, knitted thermal shell
- Sandy foam latex with 3/4 dip
- Elastic knit wrist ensures a comfortable and secure fit



**KARBONHEX**  
C33461

| RATINGS |            | COATING    | GRIP  | FEATURES | COLOR         |
|---------|------------|------------|-------|----------|---------------|
| ANSI    | EN511:2016 | EN388:2016 |       |          |               |
| A3      | 3          | XX         | 1831C | Latex    | Sandy         |
| CUT     | ABR        | TEAR       |       |          | Thermal       |
|         |            |            |       |          | Hi-Vis        |
|         |            |            |       |          | GRAY          |
|         |            |            |       |          | HI-VIS YELLOW |

| ORDERING INFORMATION            |         |
|---------------------------------|---------|
| C334613                         | M: 8    |
| C334614                         | L: 9    |
| C334615                         | XL: 10  |
| C334616                         | 2XL: 11 |
| <b>12 Pairs/Bag 6 Bags/Case</b> |         |

| PHYSICAL PROPERTIES |                   |
|---------------------|-------------------|
| Coating Material    | Latex             |
| Liner Material      | Knitted Fleece    |
| Grip Finish         | Sandy             |
| Fit Type            | Hand-Specific     |
| Length              | 10.2"             |
| Abrasion Level      | ANSI 3 / EN388 1  |
| Cut Level           | ANSI A4 / EN388 C |
| Gauge               | 10G               |

| STANDARDS AND COMPLIANCE |
|--------------------------|
| EN 511: 2016             |
| EN 388:2016              |

### KARBONHEX KX10

PURPOSE BUILT CUT-RESISTANT GLOVES

KOMPLEX HANDLING

- Close-fitting seamless 18-gauge knitted composite shell
- Fusion PU/nitrile palm coating
- Reinforced nitrile patch on thumb crotch



**KARBONHEX**  
C36590

| RATINGS |            | COATING | GRIP | FEATURES          | COLOR            |
|---------|------------|---------|------|-------------------|------------------|
| ANSI    | EN388:2016 |         |      |                   |                  |
| A3      | 6          | 4442C   |      | Nitrile PU Hybrid | Smooth           |
| CUT     | ABR        |         |      |                   | Reinforced Thumb |
|         |            |         |      |                   | BLACK            |
|         |            |         |      |                   | GRAY             |

| ORDERING INFORMATION            |         |
|---------------------------------|---------|
| C365902                         | S: 7    |
| C365903                         | M: 8    |
| C365904                         | L: 9    |
| C365905                         | XL: 10  |
| C365906                         | 2XL: 11 |
| <b>12 Pairs/Bag 6 Bags/Case</b> |         |

| PHYSICAL PROPERTIES |                                    |
|---------------------|------------------------------------|
| Coating Material    | Nitrile / Water-Based Polyurethane |
| Liner Material      | HPPE+                              |
| Grip Finish         | Micro Foam (Pitted)                |
| Fit Type            | Hand-Specific                      |
| Length              | 10.2"                              |
| Abrasion Level      | ANSI 6 / EN388 4                   |
| Cut Level           | ANSI A3 / EN388 C                  |
| Gauge               | 18G                                |

| STANDARDS AND COMPLIANCE |
|--------------------------|
| EN 388:2016              |

# KARBONHEX

## Models & Ordering Information

### KARBONHEX KX41

PURPOSE BUILT LIQUID-RESISTANT GLOVES

PRECISION HANDLING

- Elastic knit wrist for comfort
- Nitrile palm coating with sandy texture
- Smooth 3/4 dip nitrile base coating
- Superfine seamless 18-gauge knitted nylodex shell



**KARBONHEX**  
C16400

| RATINGS  |          | COATING    | GRIP    | FEATURES | COLOR             |
|----------|----------|------------|---------|----------|-------------------|
| ANSI CUT | ANSI ABR | EN388-2016 |         |          |                   |
| A1       | 6        | 4121X      | Nitrile | Sandy    | Liquid Resistance |
|          |          |            |         |          | Black / GRAY      |

### KARBONHEX KX42

PURPOSE BUILT ABRASION-RESISTANT GLOVES

PRECISION HANDLING

- Elastic knit wrist for comfortable and secure fit.
- Sandy nitrile coated palm
- 15g knitted nylodex seamless shell



**KARBONHEX**  
C16207

| RATINGS  |          | COATING    | GRIP    | FEATURES | COLOR              |
|----------|----------|------------|---------|----------|--------------------|
| ANSI CUT | ANSI ABR | EN388-2016 |         |          |                    |
| A1       | 6        | 4121X      | Nitrile | Sandy    | Precision Handling |
|          |          |            |         |          | Black / GRAY       |

### KARBONHEX KX34A

PURPOSE BUILT IMPACT-RESISTANT GLOVES

PRECISION HANDLING

- Seamless 15-gauge knitted nylodex shell
- Nitrile palm coating with sandy texture
- TPR integrated expansion slots and flex points
- Smooth 3/4 dip nitrile base coating



**KARBONHEX**  
C16677

| RATINGS  |          | COATING    | GRIP    | FEATURES | COLOR                    |
|----------|----------|------------|---------|----------|--------------------------|
| ANSI CUT | ANSI ABR | EN388-2016 |         |          |                          |
| A1       | 6        | 4121X      | Nitrile | Sandy    | Liquid Resistance Impact |
|          |          |            |         |          | Black / GRAY             |

#### ORDERING INFORMATION

|         |         |
|---------|---------|
| C164002 | S: 7    |
| C164003 | M: 8    |
| C164004 | L: 9    |
| C164005 | XL: 10  |
| C164006 | 2XL: 11 |

12 Pairs/Bag 6 Bags/Case

#### PHYSICAL PROPERTIES

|                  |                   |
|------------------|-------------------|
| Coating Material | Nitrile           |
| Liner Material   | Nylon / Spandex   |
| Grip Finish      | Sandy             |
| Fit Type         | Hand-Specific     |
| Length           | 10.2"             |
| Abrasion Level   | ANSI 6 / EN388 4  |
| Cut Level        | ANSI A1 / EN388 1 |
| Gauge            | 18G               |



#### STANDARDS AND COMPLIANCE

EN 388:2016

#### ORDERING INFORMATION

|         |         |
|---------|---------|
| C162072 | S: 7    |
| C162073 | M: 8    |
| C162074 | L: 9    |
| C162075 | XL: 10  |
| C162076 | 2XL: 11 |

12 Pairs/Bag 6 Bags/Case

#### PHYSICAL PROPERTIES

|                  |                   |
|------------------|-------------------|
| Coating Material | Nitrile           |
| Liner Material   | Nylon / Spandex   |
| Grip Finish      | Sandy             |
| Fit Type         | Hand-Specific     |
| Length           | 10.2"             |
| Abrasion Level   | ANSI 6 / EN388 4  |
| Cut Level        | ANSI A1 / EN388 1 |
| Gauge            | 15G               |



#### STANDARDS AND COMPLIANCE

EN 388:2016

#### ORDERING INFORMATION

|         |         |
|---------|---------|
| C166772 | S: 7    |
| C166773 | M: 8    |
| C166774 | L: 9    |
| C166775 | XL: 10  |
| C166776 | 2XL: 11 |

12 Pairs/Bag 6 Bags/Case

#### PHYSICAL PROPERTIES

|                  |                   |
|------------------|-------------------|
| Coating Material | Nitrile           |
| Liner Material   | Nylon / Spandex   |
| Grip Finish      | Sandy             |
| Fit Type         | Hand-Specific     |
| Length           | 10.2"             |
| Abrasion Level   | ANSI 6 / EN388 4  |
| Cut Level        | ANSI A1 / EN388 1 |
| Gauge            | 15G               |



#### STANDARDS AND COMPLIANCE

EN 388:2016

# KARBONHEX

## Models & Ordering Information

### KARBONHEX KX80

PURPOSE BUILT CUT-RESISTANT GLOVES

KOMPLEX HANDLING

- Comfortable elastic knit wrist
- Sandy foam nitrile palm coating
- Lightweight close fitting 18-gauge composite knit shell



KARBONHEX

C44280

| RATINGS |      | COATING    | GRIP         | FEATURES    | COLOR        |
|---------|------|------------|--------------|-------------|--------------|
| ANSI    | ANSI | EN388:2016 | EN16350:2016 |             |              |
| A4      | 4    | 4          | 4            | Nitrile     | Sandy        |
|         |      |            |              | Touchscreen | Anti-static  |
|         |      |            |              |             | BLACK / GRAY |

### KARBONHEX KX90

PURPOSE BUILT IMPACT-RESISTANT

GLOVES KOMPLEX HANDLING

- Close fitting 18-gauge composite knit shell
- Sandy foam nitrile palm coating
- Full, low profile finger and knuckle TPR guards



KARBONHEX

C44270

| RATINGS |      | COATING         | GRIP       | FEATURES    | COLOR        |
|---------|------|-----------------|------------|-------------|--------------|
| ANSI    | ANSI | ANSI / ESEA 138 | EN388:2016 |             |              |
| A4      | 4    | 1               | 4          | Nitrile     | Sandy        |
|         |      |                 |            | Touchscreen | Impact       |
|         |      |                 |            |             | Black / GRAY |

#### ORDERING INFORMATION

|         |         |
|---------|---------|
| C442802 | S: 7    |
| C442803 | M: 8    |
| C442804 | L: 9    |
| C442805 | XL: 10  |
| C442806 | 2XL: 11 |

12 Pairs/Bag 6 Bags/Case

#### PHYSICAL PROPERTIES

|                  |                   |
|------------------|-------------------|
| Coating Material | Nitrile           |
| Liner Material   | HPPE +            |
| Grip Finish      | Sandy             |
| Fit Type         | Hand-Specific     |
| Length           | 10.2"             |
| Abrasion Level   | ANSI 4 / EN388 3  |
| Cut Level        | ANSI A4 / EN388 B |
| Gauge            | 18G               |



#### STANDARDS AND COMPLIANCE

|                |
|----------------|
| EN 388:2016    |
| EN 16350: 2016 |

#### ORDERING INFORMATION

|         |         |
|---------|---------|
| C442702 | S: 7    |
| C442703 | M: 8    |
| C442704 | L: 9    |
| C442705 | XL: 10  |
| C442706 | 2XL: 11 |

12 Pairs/Bag 6 Bags/Case

#### PHYSICAL PROPERTIES

|                  |                   |
|------------------|-------------------|
| Coating Material | Nitrile           |
| Liner Material   | HPPE +            |
| Grip Finish      | Sandy             |
| Fit Type         | Hand-Specific     |
| Length           | 10.2"             |
| Abrasion Level   | ANSI 4 / EN388 4  |
| Cut Level        | ANSI A4 / EN388 D |
| Gauge            | 18G               |



#### STANDARDS AND COMPLIANCE

|             |
|-------------|
| EN 388:2016 |
|-------------|

# BULLSEYE™

## NEVER BACKED DOWN

SW® cut-resistant glove series with AxiFybr® engineered yarn technologies and protection features that enhance comfort and enable workers to perform at their best.



# BULLSEYE™

## Models & Ordering Information

### BULLSEYE C34100

#### CUT-RESISTANT GLOVES

- 18-gauge AxiFybr® engineered yarn liner offers ANSI A3 cut resistance against lower risk hazards.
- Smooth polyurethane palm coating provides added grip in dry and light oil conditions.



**BULLSEYE**  
C34100

| RATINGS     |                 | COATING | GRIP   | FEATURES                              | COLOR         |
|-------------|-----------------|---------|--------|---------------------------------------|---------------|
| ANSI A3 CUT | ANSI 4 ABRASION | PU      | Smooth | AxiFybr®<br>Touchscreen<br>Compatible | BLACK<br>GRAY |

### BULLSEYE C55104

#### CUT-RESISTANT GLOVES

- ANSI A5 cut resistance and high abrasion resistance enable this glove to take on challenging tasks in a variety of environments.
- AxiFybr® engineered yarn technology provides enhanced comfort while palm coating at ANSI 5 abrasion resistance delivers long-lasting gloves.



**BULLSEYE**  
C55104

| RATINGS     |                 | COATING | GRIP   | FEATURES                              | COLOR         |
|-------------|-----------------|---------|--------|---------------------------------------|---------------|
| ANSI A5 CUT | ANSI 5 ABRASION | PU      | Smooth | AxiFybr®<br>Touchscreen<br>Compatible | BLACK<br>GRAY |

### BULLSEYE C56201

#### CUT-RESISTANT GLOVES

- This tough glove features red on the palm and high-visibility yellow on the back for added safety in high-risk environments.
- AxiFybr® engineered yarn technology provides greater comfort at ANSI A5 cut resistance while coating delivers ANSI 6 abrasion resistance for the maximum level of durability.



**BULLSEYE**  
C56201

| RATINGS     |                 | COATING              | GRIP  | FEATURES           | COLOR                |
|-------------|-----------------|----------------------|-------|--------------------|----------------------|
| ANSI A5 CUT | ANSI 6 ABRASION | Micro Porous Nitrile | Sandy | AxiFybr®<br>Hi-Vis | RED<br>HI-VIS YELLOW |

#### ORDERING INFORMATION

|         |         |
|---------|---------|
| C341001 | XS: 6   |
| C341002 | S: 7    |
| C341003 | M: 8    |
| C341004 | L: 9    |
| C341005 | XL: 10  |
| C341006 | 2XL: 11 |

12 Pairs/Bag 6 Bags/Case

#### PHYSICAL PROPERTIES

|                  |               |
|------------------|---------------|
| Coating Material | PU            |
| Liner Material   | AxiFybr®      |
| Grip Finish      | Smooth        |
| Fit Type         | Hand-Specific |
| Length           | 10.2"         |
| Abrasion Level   | ANSI 4        |
| Cut Level        | ANSI A3       |
| Gauge            | 18G           |



#### STANDARDS AND COMPLIANCE

|                      |
|----------------------|
| EN 420:2003+A1: 2009 |
| EN 388:2016          |
| 21CFR 177.1520       |

#### ORDERING INFORMATION

|         |         |
|---------|---------|
| C551042 | S: 7    |
| C551043 | M: 8    |
| C551044 | L: 9    |
| C551045 | XL: 10  |
| C551046 | 2XL: 11 |
| C551042 | 3XL: 12 |

12 Pairs/Bag 6 Bags/Case

#### PHYSICAL PROPERTIES

|                  |                    |
|------------------|--------------------|
| Coating Material | REACH Compliant PU |
| Liner Material   | AxiFybr®           |
| Grip Finish      | Smooth             |
| Fit Type         | Hand-Specific      |
| Length           | 10.2"              |
| Abrasion Level   | ANSI 5 — EN388 4   |
| Cut Level        | ANSI A5 — EN388 E  |
| Gauge            | 13G                |



#### STANDARDS AND COMPLIANCE

|                      |
|----------------------|
| EN 420:2003+A1: 2009 |
| EN 388:2016          |
| 21CFR 177.1520       |

#### ORDERING INFORMATION

|         |         |
|---------|---------|
| C562012 | S: 7    |
| C562013 | M: 8    |
| C562014 | L: 9    |
| C562015 | XL: 10  |
| C562016 | 2XL: 11 |

12 Pairs/Bag 6 Bags/Case

#### PHYSICAL PROPERTIES

|                  |                      |
|------------------|----------------------|
| Coating Material | Micro Porous Nitrile |
| Liner Material   | AxiFybr®             |
| Grip Finish      | Sandy                |
| Fit Type         | Hand-Specific        |
| Length           | 10.2"                |
| Abrasion Level   | ANSI 6 — EN388 4     |
| Cut Level        | ANSI A5 — EN388 E    |
| Gauge            | 13G                  |



#### STANDARDS AND COMPLIANCE

|                      |
|----------------------|
| EN 420:2003+A1: 2009 |
| EN 388:2016          |
| 21CFR 177.1520       |

# BULLSEYE™

## Models & Ordering Information

### BULLSEYE C56221

PURPOSE BUILT LIQUID-RESISTANT GLOVES

PRECISION HANDLING

- Proprietary high flexibility TPR with a padded palm, thumb crotch patch, and a distinct feature that allows for Stop & Go signaling at a distance ensures this tough glove is prepared to handle demanding, high-risk environments.
- AxiFybr® engineered yarn technology provides greater comfort at ANSI A5 cut resistance while coating delivers ANSI 6 abrasion resistance for the maximum level of durability.



**BULLSEYE**  
C56221

| RATINGS     |                 | COATING           | GRIP                 | FEATURES               | COLOR               |
|-------------|-----------------|-------------------|----------------------|------------------------|---------------------|
| ANSI A5 CUT | ANSI 6 ABRASION | ANSI / ISEA 138 2 | Micro Porous Nitrile | TPR AxiFybr® Thumb Pad | RED / HI-VIS YELLOW |

### BULLSEYE C56231

CUT-RESISTANT GLOVES

- 13-gauge AxiFybr® engineered yarn liner delivers comfort at high levels of cut resistance.
- Sandy microporous nitrile coating provides superior grip in oily and wet conditions.
- Advanced flexible TPR for ANSI level 2 impact resistance that does not sacrifice mobility or comfort.
- Palm padding to protect hands from repetitive impacts and vibrating tools.



**BULLSEYE**  
C56231

| RATINGS     |                 | COATING           | GRIP                 | FEATURES                        | COLOR               |
|-------------|-----------------|-------------------|----------------------|---------------------------------|---------------------|
| ANSI A5 CUT | ANSI 6 ABRASION | ANSI / ISEA 138 2 | Micro Porous Nitrile | TPR AxiFybr® Extended Thumb Pad | RED / HI-VIS YELLOW |

#### ORDERING INFORMATION

|         |         |
|---------|---------|
| C562213 | M: 8    |
| C562214 | L: 9    |
| C562215 | XL: 10  |
| C562216 | 2XL: 11 |
| C562217 | 3XL: 12 |

6 Pairs/Bag 6 Bags/Case

#### PHYSICAL PROPERTIES

|                  |                      |
|------------------|----------------------|
| Coating Material | Micro Porous Nitrile |
| Liner Material   | AxiFybr®             |
| Grip Finish      | Sandy                |
| Fit Type         | Hand-Specific        |
| Length           | 10.2"                |
| Abrasion Level   | ANSI 6 — EN388 4     |
| Cut Level        | ANSI A5 — EN388 E    |
| Gauge            | 13G                  |



#### STANDARDS AND COMPLIANCE

|                      |
|----------------------|
| EN 420:2003+A1: 2009 |
| EN 388:2016          |
| 21CFR 177.1520       |

#### ORDERING INFORMATION

|         |         |
|---------|---------|
| C562313 | M: 8    |
| C562314 | L: 9    |
| C562315 | XL: 10  |
| C562316 | 2XL: 11 |
| C562317 | 3XL: 12 |

6 Pairs/Bag 6 Bags/Case

#### PHYSICAL PROPERTIES

|                  |                      |
|------------------|----------------------|
| Coating Material | Micro Porous Nitrile |
| Liner Material   | AxiFybr®             |
| Grip Finish      | Sandy                |
| Fit Type         | Hand-Specific        |
| Length           | 10.2"                |
| Abrasion Level   | ANSI 6 — EN388 4     |
| Cut Level        | ANSI A5 — EN388 E    |
| Gauge            | 13G                  |



#### STANDARDS AND COMPLIANCE

|                      |
|----------------------|
| EN 420:2003+A1: 2009 |
| EN 388:2016          |
| 21CFR 177.1520       |





# CHEMICAL PROTECTION

SW® is advancing materials science and new manufacturing processes to develop chemical protection products with exact safety specifications while maintaining a focus on work comfort and hand health.

# NEWTRILE®

## HANDLE THE HOSTILE

NewTrile® are the industry's first reusable chemical protection gloves with EcoTek® Biodegradable Technology. Advanced chemical protection now has a smaller carbon footprint.



# NEWTRILE®

## Models & Ordering Information

### NEWTRILE® NU11-RD-ECO-GR

11 MIL UNLINED NITRILE CHEMICAL-RESISTANT GLOVES WITH ECOTEK®

- 11 mil thickness and 13 inch cuff length for added protection.
- EcoTek Biodegradability Technology accelerates breakdown in landfills without any performance loss.
- Case-hardened exterior for enhanced physical and chemical performance.



### NEWTRILE® NU15-RD-ECO-GR

15 MIL UNLINED NITRILE CHEMICAL-RESISTANT GLOVES WITH ECOTEK®

- 15 mil thickness and 13 inch cuff length for added protection.
- EcoTek Biodegradability Technology accelerates breakdown in landfills without any performance loss.
- Case-hardened exterior for enhanced physical and chemical performance.



### NEWTRILE® NF15-RD-ECO-GR

15 MIL FLOCK-LINED NITRILE CHEMICAL-RESISTANT GLOVES WITH ECOTEK®

- 15 mil thickness and 13 inch cuff length for added protection.
- EcoTek Biodegradability Technology accelerates breakdown in landfills without any performance loss.
- Case-hardened exterior for enhanced physical and chemical performance.



#### ORDERING INFORMATION

|         |        |
|---------|--------|
| N501092 | XS: 7  |
| N501093 | S: 8   |
| N501094 | M: 9   |
| N501095 | L: 10  |
| N501096 | XL: 11 |

12 Pairs/Bag 12 Bags/Case

#### PHYSICAL PROPERTIES

|                               |               |
|-------------------------------|---------------|
| Liner Material                | Unlined       |
| Material                      | Nitrile       |
| Cuff Type                     | Straight      |
| Fit Type                      | Hand Specific |
| Length                        | 13"           |
| Palm Thickness                | 11mil         |
| Tensile Strength Before Aging | 20 MPa        |
| Elongation Before Aging       | 580%          |
| AQL                           | 1.5           |



#### STANDARDS AND COMPLIANCE

FDA 21 CFR 177.2600

#### ORDERING INFORMATION

|         |        |
|---------|--------|
| N505092 | XS: 7  |
| N505093 | S: 8   |
| N505094 | M: 9   |
| N505095 | L: 10  |
| N505096 | XL: 11 |

12 Pairs/Bag 12 Bags/Case

#### PHYSICAL PROPERTIES

|                               |               |
|-------------------------------|---------------|
| Liner Material                | Unlined       |
| Material                      | Nitrile       |
| Cuff Type                     | Straight      |
| Fit Type                      | Hand Specific |
| Length                        | 13"           |
| Palm Thickness                | 15mil         |
| Tensile Strength Before Aging | 20 MPa        |
| Elongation Before Aging       | 400%          |
| AQL                           | 1.5           |



#### STANDARDS AND COMPLIANCE

FDA 21 CFR 177.2600

#### ORDERING INFORMATION

|         |        |
|---------|--------|
| N515092 | XS: 7  |
| N515093 | S: 8   |
| N515094 | M: 9   |
| N515095 | L: 10  |
| N515096 | XL: 11 |

12 Pairs/Bag 12 Bags/Case

#### PHYSICAL PROPERTIES

|                               |                   |
|-------------------------------|-------------------|
| Liner Material                | Advanced Flocking |
| Material                      | Nitrile           |
| Cuff Type                     | Straight          |
| Fit Type                      | Hand Specific     |
| Length                        | 13"               |
| Palm Thickness                | 15mil             |
| Tensile Strength Before Aging | 20 MPa            |
| Elongation Before Aging       | 300%              |
| AQL                           | 1.5               |



#### STANDARDS AND COMPLIANCE

FDA 21 CFR 177.2600

# CORES SAFE<sup>®</sup>

## NATURAL RUBBER PROTECTION

Coresafe gloves combine natural rubber protection in lined and unlined styles. Experience the comfort, flexibility, and easy donning and doffing of natural rubber for protection against many acids, alkalis, chemicals, gases, and vapors.



# CORES SAFE®

## Models & Ordering Information



### CORES SAFE® F280

NATURAL RUBBER CHEMICAL-RESISTANT GLOVES

FLOCK-LINED

- Orange natural rubber latex
- 28mil thick and 13" length for protection
- Raised Diamond grip pattern
- Flock-lined for donning and comfort
- Double chlorinated inner & outer surfaces
- 12 pairs per poly bag, 12 poly bags per case

#### ORDERING INFORMATION

|         |       |
|---------|-------|
| L519012 | XS: 7 |
| L519013 | S: 8  |
| L519014 | M: 9  |
| L519015 | L: 10 |

12 Pairs/Bag 12 Bags/Case

#### PHYSICAL PROPERTIES

|                               |                   |
|-------------------------------|-------------------|
| Liner Material                | Advanced Flocking |
| Material                      | Latex             |
| Cuff Type                     | Straight          |
| Fit Type                      | Hand Specific     |
| Length                        | 13"               |
| Palm Thickness                | 28mil             |
| Tensile Strength Before Aging | 10 MPa            |
| Tensile Strength After Aging  | 7.5 MPa           |
| Elongation Before Aging       | 500%              |
| Elongation After Aging        | 375%              |
| AQL                           | 2.5               |



#### STANDARDS AND COMPLIANCE

FDA 21 CFR 177.2600



### CORES SAFE® F28YB

NATURAL RUBBER & NEOPRENE CHEMICAL-RESISTANT

GLOVES FLOCK-LINED

- 2-Layer / 2-Color blue neoprene over yellow latex
- 28mil thick and 13" length for protection
- Embossed raised-diamond surface for wet/dry grip
- Flock-lined for donning and comfort
- Double chlorinated inner & outer surfaces
- 12 pairs per poly bag, 12 poly bags per case

#### ORDERING INFORMATION

|         |       |
|---------|-------|
| T519252 | XS: 7 |
| T519253 | S: 8  |
| T519254 | M: 9  |
| T519255 | L: 10 |

12 Pairs/Bag 12 Bags/Case

#### PHYSICAL PROPERTIES

|                               |                   |
|-------------------------------|-------------------|
| Liner Material                | Advanced Flocking |
| Material                      | Latex/Neoprene    |
| Cuff Type                     | Straight          |
| Fit Type                      | Hand Specific     |
| Length                        | 13"               |
| Palm Thickness                | 28mil             |
| Tensile Strength Before Aging | 10 MPa            |
| Tensile Strength After Aging  | 7.5 MPa           |
| Elongation Before Aging       | 500%              |
| Elongation After Aging        | 375%              |
| AQL                           | 2.5               |



#### STANDARDS AND COMPLIANCE

FDA 21 CFR 177.2600



### CORES SAFE® U17N

NATURAL RUBBER CHEMICAL-RESISTANT GLOVES

UNLINED

- Natural rubber latex
- 17mil thick and 12" length for protection
- Fish scale grip pattern
- Unlined for donning and comfort
- Double chlorinated inner & outer surfaces
- 12 pairs per poly bag, 12 poly bags per case

#### ORDERING INFORMATION

|         |       |
|---------|-------|
| L507032 | XS: 7 |
| L507033 | S: 8  |
| L507034 | M: 9  |
| L507035 | L: 10 |

12 Pairs/Bag 12 Bags/Case

#### PHYSICAL PROPERTIES

|                               |               |
|-------------------------------|---------------|
| Liner Material                | Unlined       |
| Material                      | Latex         |
| Cuff Type                     | Straight      |
| Fit Type                      | Hand Specific |
| Length                        | 12"           |
| Palm Thickness                | 17mil         |
| Tensile Strength Before Aging | 10 MPa        |
| Tensile Strength After Aging  | 7.5 MPa       |
| Elongation Before Aging       | 500%          |
| Elongation After Aging        | 375%          |
| AQL                           | 2.5           |



#### STANDARDS AND COMPLIANCE

FDA 21 CFR 177.2600

# CORES SAFE®

## Models & Ordering Information



### CORES SAFE® F13Y

NATURAL RUBBER CHEMICAL-RESISTANT GLOVES

FLOCK-LINED

- Yellow natural rubber latex
- 13mil thick and 12" length for protection
- Fish scale grip pattern
- Flock-lined for donning and comfort
- Double chlorinated inner & outer surfaces
- 12 pairs per poly bag, 12 poly bags per case



### PC-F22B

NATURAL RUBBER CHEMICAL-RESISTANT GLOVES

FLOCK-LINED

- 22mil thick and 12.6 inch cuff length for added protection
- Embossed fish scale pattern for wet/dry grip
- Case Hardened for enhanced physical and chemical performance while providing easier and more comfortable donning and doffing
- 12 pairs per poly bag, 12 poly bags per case

#### ORDERING INFORMATION

|         |       |
|---------|-------|
| L513002 | XS: 7 |
| L513003 | S: 8  |
| L513004 | M: 9  |
| L513005 | L: 10 |

12 Pairs/Bag 12 Bags/Case

#### PHYSICAL PROPERTIES

|                               |                      |
|-------------------------------|----------------------|
| Liner Material                | Cotton Flock         |
| Material                      | Natural Rubber Latex |
| Cuff Type                     | Straight             |
| Fit Type                      | Hand Specific        |
| Length                        | 12"                  |
| Palm Thickness                | 13mil                |
| Tensile Strength Before Aging | 10 MPa               |
| Tensile Strength After Aging  | 7.5 MPa              |
| Elongation Before Aging       | 500%                 |
| Elongation After Aging        | 375%                 |
| AQL                           | 2.5                  |



#### STANDARDS AND COMPLIANCE

FDA 21 CFR 177.2600

#### ORDERING INFORMATION

|         |         |
|---------|---------|
| L518071 | XS: 6   |
| L518072 | S: 7    |
| L518073 | M: 8    |
| L518074 | L: 9    |
| L518075 | XL: 10  |
| L518076 | 2XL: 11 |

2 Pairs/Roll 6 Rolls/Bag  
12 Bags/Case

#### PHYSICAL PROPERTIES

|                               |                      |
|-------------------------------|----------------------|
| Liner Material                | Cotton Flock         |
| Material                      | Natural Rubber Latex |
| Cuff Type                     | Straight             |
| Fit Type                      | Hand Specific        |
| Length                        | 12.6"                |
| Palm Thickness                |                      |
| Tensile Strength Before Aging |                      |
| Tensile Strength After Aging  |                      |
| Elongation Before Aging       |                      |
| Elongation After Aging        |                      |
| AQL                           |                      |



#### STANDARDS AND COMPLIANCE

FDA 21 CFR 177.2600

# UNDERSTANDING CUT STANDARDS

## EN388

### EUROPEAN STANDARD


Uses Coup Test as well as the TDM-100 cut machine to test cut level (ISO 13997)

EN388:2016



4 X 4 3 F

- Abrasion 0-4
- Cut (Coup) 0-5/X
- Tear 0-4
- Puncture 0-4
- Cut (TDM-100) A-F/X

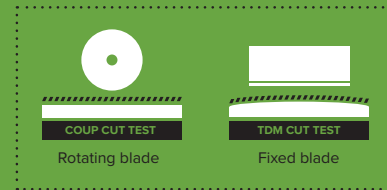


## ANSI

### U.S. STANDARD

Uses TDM-100 cut machine to test cut level (ISO 13997)



Cut (TDM-100) A1 - A9



GRAPHEX G66200

GRAPHEX G45100

GRAPHEX G46200

| RISK LEVEL    | Low                  |                      |                        |                        |                        |                        |                        |                        |                    | High |
|---------------|----------------------|----------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|--------------------|------|
| ANSI grams    | <b>A1</b><br>200-499 | <b>A2</b><br>500-999 | <b>A3</b><br>1000-1499 | <b>A4</b><br>1500-2199 | <b>A5</b><br>2200-2999 | <b>A6</b><br>3000-3999 | <b>A7</b><br>4000-4999 | <b>A8</b><br>5000-5999 | <b>A9</b><br>6000+ |      |
| EN388 Newtons | <b>A</b><br>2N-5N    | <b>B</b><br>5N-10N   | <b>C</b><br>10N-15N    | <b>D</b><br>15N-22N    | <b>E</b><br>22N-30N    | <b>F</b><br>30N+       |                        |                        |                    |      |

### COMPARING ANSI/EN388 CUT LEVELS

# UNDERSTANDING CHEMICAL STANDARDS

## EN374-5

Indicates glove has passed test methods to protect against micro-organisms and fungi.

EN374-5:2016



## ISO 374-1

Specifies resistance to chemical permeation.

ISO 374-1:2016/TYP C



K

Code A - R: glove resistance against specific chemicals

| Code | Chemical              | CAS number | Class                               |
|------|-----------------------|------------|-------------------------------------|
| A    | Methanol              | 67-56-1    | Primary alcohol                     |
| B    | Acetone               | 67-64-1    | Ketone                              |
| C    | Acetonitrile          | 75-05-8    | Nitrile composite                   |
| D    | Dichloromethane       | 75-09-2    | Chlorinated hydrocarbon             |
| E    | Carbon disulphide     | 75-15-0    | Organic compound containing sulphur |
| F    | Toluene               | 108-88-3   | Aromatic hydrocarbon                |
| G    | Diethylamine          | 109-89-7   | Amine                               |
| H    | Tetrahydrofuranne     | 109-99-9   | Heterocyclic ether compound         |
| I    | Ethyl acetate         | 141-78-6   | Ester                               |
| J    | n-Heptane             | 142-82-5   | Saturated hydrocarbon               |
| K    | Sodium hydroxide 40%  | 1310-73-2  | Inorganic base                      |
| L    | Sulfuric acid 96%     | 7664-93-9  | Inorganic mineral acid, oxidising   |
| M    | Nitric acid 65%       | 7697-37-2  | Inorganic mineral acid, oxidising   |
| N    | Acetic acid 99%       | 64-19-7    | Organic acid                        |
| O    | Ammonia 25%           | 1336-21-6  | Organic base                        |
| P    | Hydrogen Peroxide 30% | 7722-84-1  | Peroxide                            |
| Q    | Hydrofluoric acid 40% | 7664-39-3  | Inorganic mineral acid              |
| R    | Formaldehyde 37%      | 50-00-0    | Aldehyde                            |

Type A - C: time before chemical breakthrough at the molecular level

| Protection type | Chemical breakthrough time                            |
|-----------------|---|
| <b>TYPE A</b>   | 30 minutes (level 2) against minimum 6 test chemicals |
| <b>TYPE B</b>   | 30 minutes (level 2) against minimum 3 test chemicals |
| <b>TYPE C</b>   | 10 minutes (level 1) against minimum 1 test chemical  |

# Glove Size Selection

THE RIGHT GLOVE IS THE RIGHT SIZE.

## FIT FOR COMFORT: SINGLE-USE


Selecting the right size glove is essential for optimal performance. A glove that fits too snugly put strains on the small hand muscles, which leads to hand fatigue and discomfort.

Don a glove, and with your fingers stretched out, press the center of your palm with your other hand. If the glove is too tight, you will feel resistance and/or an air pocket between the glove and your palm.



## ALL SW® GLOVES

To get an estimate of the correct size glove, measure the widest part of your hand with the chart to the right. Measure from the saddle of the thumb and index finger to the opposite side of your hand.

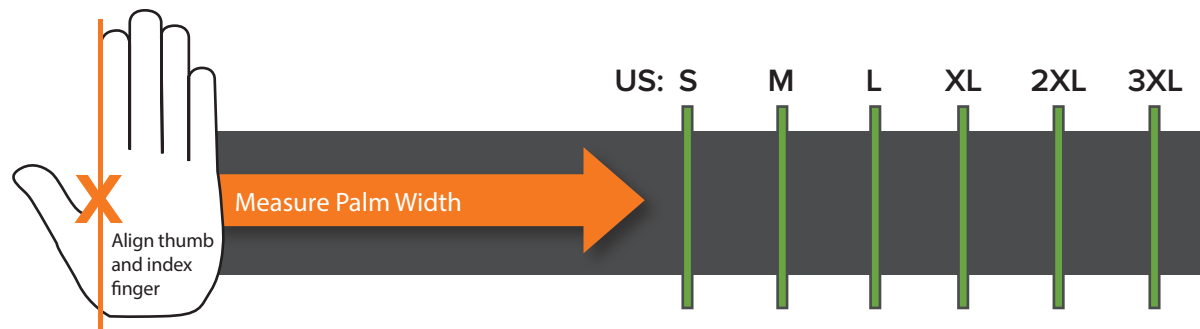

# Specification Guide

| Part Number                                      | Product Name     | Color             | Finger Mil       | Palm Mil      | Weight         | Outer Surface  | AQL              | Packaging           | Page                     |                         |      |
|--|------------------|-------------------|------------------|---------------|----------------|----------------|------------------|---------------------|--------------------------|-------------------------|------|
| <b>Single-Use Powder Free Nitrile Exam</b>       |                  |                   |                  |               |                |                |                  |                     |                          |                         |      |
| N12840X  | TF-95LG          | Light Green       | 4.0mil           | 3.6mil        | 5.0g           | Fully Textured | 1.5              | 100/Bx 1000/Cs      | 20                       |                         |      |
| N30134X  | TF-95RB          | Royal Blue        | 4.7mil           | 3.1mil        | 5.0g           | Textured       | 1.5              | 100/Bx 1000/Cs      | 20                       |                         |      |
| N02740X  | TF-12LG          | Light Green       | 5.9mil           | 4.9mil        | 7.5g           | Fully Textured | 1.5              | 100/Bx 1000/Cs      | 20                       |                         |      |
| N71688X  | PF-90BK          | Black             | 5.6mil           | 5.0mil        | 6.5g           | Fully Textured | 1.5              | 100/Bx 1000/Cs      | 26                       |                         |      |
| N20036X  | PF-95TL          | Teal              | 5.8mil           | 5.0mil        | 6.5g           | Fully Textured | 1.5              | 100/Bx 1000/Cs      | 26                       |                         |      |
| N18947X  | PF-95GW          | Green / White     | 5.9mil           | 4.9mil        | 6.5g           | Fully Textured | 1.5              | 50/Bx 500/Cs        | 26                       |                         |      |
| N12940X  | PF-95LG          | Light Green       | 5.9mil           | 5.1mil        | 7.0g           | Fully Textured | 1.5              | 100/Bx 1000/Cs      | 28                       |                         |      |
| N10655X  | PF-95BL          | Blue              | 6.9mil           | 6.1mil        | 8.5g           | Fully Textured | 1.5              | 50/Bx 500/Cs        | 28                       |                         |      |
| N26050X  | PF-95GY          | Gray              | 8.2mil           | 6.2mil        | 8.8g           | Fully Textured | 1.5              | 50/Bx 500/Cs        | 30                       |                         |      |
| N12736X  | PF-12TL          | Teal              | 7.1mil           | 6.2mil        | 10.7g          | Fully Textured | 1.5              | 50/Bx 500/Cs        | 30                       |                         |      |
| N99175X  | PF-95OR          | Orange            | 5.9mil           | 5.1mil        | 7.5g           | Fully Textured | 1.5              | 100/Bx 1000/Cs      | 28                       |                         |      |
| N26088X  | MM-11BK          | Black             | 10.1mil          | 8.5mil        | 12.8g          | Fully Textured | 1.5              | 50/Bx 500/Cs        | 38                       |                         |      |
| <b>Thermoplastic Elastomer (TPE)</b>             |                  |                   |                  |               |                |                |                  |                     |                          |                         |      |
| P70010X  | P-021-098-WT     | White             | 2.1mil           | 2.1mil        | 2.1g           | Smooth         | 4.0              | 200/Bx 1000/Cs      | 42                       |                         |      |
| P79010X  | P-024-098-ECO-WT | White             | 3.2mil           | 3.2mil        | 2.4g           | Smooth         | 1.5              | 200/Bx 1000/Cs      | 42                       |                         |      |
| <b>Single-Use Powder Free Neoprene Exam</b>      |                  |                   |                  |               |                |                |                  |                     |                          |                         |      |
| K00040X  | PC-044-095       | Green             | 3.5mil           | 2.8mil        | 4.4g           | Fully Textured | 1.5              | 100/Bx 1000/Cs      | 34                       |                         |      |
| K00140X  | PC-95GR          | Green             | 6.2mil           | 4.7mil        | 7.9g           | Fully Textured | 1.5              | 100/Bx 1000/Cs      | 34                       |                         |      |
| K07140X  | PC-115GR         | Green             | 7.5mil           | 5.9mil        | 12.1g          | Fully Textured | 1.5              | 50/Bx500/Cs         | 34                       |                         |      |
| Part Number                                      | Product Name     | Liner Material    | Coating Material | Color         | Cut Level      | Abrasion Level | Gauge            | Grip Finish         | Fit Type                 | Packaging               | Page |
| <b>Cut-Resistant</b>                             |                  |                   |                  |               |                |                |                  |                     |                          |                         |      |
| G45100X  | GraphEx® G45100  | AxiFybr®          | Nitrile          | Gray / Black  | ANSI A4        | ANSI 5         | 18               | Smooth              | Hand Specific            | 12 Pairs/Bag, 6 Bags/Cs | 48   |
| G46200X  | GraphEx® G46200  | AxiFybr®          | Nitrile          | Gray / Black  | ANSI A4        | ANSI 6         | 18               | Sandy               | Hand Specific            | 12 Pairs/Bag, 6 Bags/Cs | 48   |
| G66200X  | GraphEx® G66200  | AxiFybr®          | Nitrile          | Gray / Black  | ANSI A6        | ANSI 6         | 18               | Sandy               | Hand Specific            | 12 Pairs/Bag, 6 Bags/Cs | 48   |
| C24465X  | KarbonHex KX70   | Knitted Fleece    | Latex            | Gray / Black  | ANSI A2        | ANSI 4         | 10               | Sandy               | Hand-Specific            | 12 Pairs/Bag, 6 Bags/Cs | 52   |
| C33461X  | KarbonHex KX84V  | Knitted Fleece    | Latex            | Gray / Yellow | ANSI A3        | ANSI 3         | 10               | Sandy               | Hand-Specific            | 12 Pairs/Bag, 6 Bags/Cs | 52   |
| C36590X  | KarbonHex KX10   | HPPE +            | Nitrile / PU     | Gray / Black  | ANSI A3        | ANSI 6         | 18               | Micro Foam (Pitted) | Hand-Specific            | 12 Pairs/Bag, 6 Bags/Cs | 52   |
| C16400X  | KarbonHex KX41   | Nylon / Spandex   | Nitrile          | Gray / Black  | ANSI A1        | ANSI 6         | 18               | Sandy               | Hand-Specific            | 12 Pairs/Bag, 6 Bags/Cs | 54   |
| C16207X  | KarbonHex KX42   | Nylon / Spandex   | Nitrile          | Gray / Black  | ANSI A1        | ANSI 6         | 15               | Sandy               | Hand-Specific            | 12 Pairs/Bag, 6 Bags/Cs | 54   |
| C16677X  | KarbonHex KX43A  | Nylon / Spandex   | Nitrile          | Gray / Black  | ANSI A1        | ANSI 6         | 15               | Sandy               | Hand-Specific            | 6 Pairs/Bag, 6 Bags/Cs  | 54   |
| C44280X  | KarbonHex KX80   | HPPE +            | Nitrile          | Gray / Black  | ANSI A4        | ANSI 4         | 18               | Sandy               | Hand-Specific            | 12 Pairs/Bag, 6 Bags/Cs | 56   |
| C44270X  | KarbonHex KX90   | HPPE +            | Nitrile          | Gray / Black  | ANSI A4        | ANSI 4         | 18               | Sandy               | Hand-Specific            | 6 Pairs/Bag, 6 Bags/Cs  | 56   |
| C34100X  | BullsEye C34100  | AxiFybr®          | PU               | Black / Gray  | ANSI A3        | ANSI 4         | 18               | Smooth              | Hand-Specific            | 12 Pairs/Bag, 6 Bags/Cs | 60   |
| C55104X  | BullsEye C55104  | AxiFybr®          | PU               | Black / Gray  | ANSI A5        | ANSI 5         | 13               | Smooth              | Hand-Specific            | 12 Pairs/Bag, 6 Bags/Cs | 60   |
| C56201X  | BullsEye C56201  | AxiFybr®          | Nitrile          | Red / Yellow  | ANSI A5        | ANSI 6         | 13               | Sandy               | Hand-Specific            | 12 Pairs/Bag, 6 Bags/Cs | 60   |
| C56221X  | BullsEye C56221  | AxiFybr®          | Nitrile          | Red / Yellow  | ANSI A5        | ANSI 6         | 13               | Sandy               | Hand-Specific            | 6 Pairs/Bag, 6 Bags/Cs  | 62   |
| C56231X  | BullsEye C56231  | AxiFybr®          | Nitrile          | Red / Yellow  | ANSI A5        | ANSI 6         | 13               | Sandy               | Hand-Specific            | 6 Pairs/Bag, 6 Bags/Cs  | 62   |
| Part Number                                      | Product Name     | Liner Material    | Coating Material | Color         | Puncture Level | Abrasion Level | Grip Finish      | Fit Type            | Packaging                | Page                    |      |
| <b>Chemical-Resistant - Nitrile</b>              |                  |                   |                  |               |                |                |                  |                     |                          |                         |      |
| N50109X  | NewTrile® U11    | N/A               | N/A              | Green         | ANSI 2         | ANSI 6         | Recessed Diamond | Hand Specific       | 12 Pairs/Bag, 12 Bags/Cs | 68                      |      |
| N50509X  | NewTrile® U15    | N/A               | N/A              | Green         | ANSI 3         | ANSI 6         | Recessed Diamond | Hand Specific       | 12 Pairs/Bag, 12 Bags/Cs | 68                      |      |
| N51509X  | NewTrile® F15    | Advanced Flocking | N/A              | Green         | ANSI 3         | ANSI 6         | Recessed Diamond | Hand Specific       | 12 Pairs/Bag, 12 Bags/Cs | 68                      |      |
| <b>Chemical-Resistant - Natural Rubber Latex</b> |                  |                   |                  |               |                |                |                  |                     |                          |                         |      |
| L51807X  | PowerChem® F22B  | Cotton Flock      | N/A              | Blue          | ANSI 2         | ANSI 3         | Fish Scale       | Hand Specific       | 12 Pairs/Bag, 12 Bags/Cs | 74                      |      |
| L51300X  | CoreSafe® F13Y   | Cotton Flock      | N/A              | Yellow        | ANSI 1         | ANSI 3         | Fish Scale       | Hand Specific       | 12 Pairs/Bag, 12 Bags/Cs | 74                      |      |
| L50703X  | CoreSafe® U17N   | N/A               | N/A              | Natural       | ANSI 1         | ANSI 3         | Fish Scale       | Hand Specific       | 12 Pairs/Bag, 12 Bags/Cs | 72                      |      |
| L51901X  | CoreSafe® F280   | Cotton Flock      | N/A              | Orange        | ANSI 2         | ANSI 3         | Raised Diamond   | Hand Specific       | 12 Pairs/Bag, 12 Bags/Cs | 72                      |      |
| T51925X  | CoreSafe® F28YB  | Cotton Flock      | Neoprene         | Yellow / Blue | ANSI 1         | ANSI 3         | Raised Diamond   | Hand Specific       | 12 Pairs/Bag, 12 Bags/Cs | 72                      |      |





[SWsafety.com](http://SWsafety.com)



v.012022.1